



Ventilated facade system


TS-200

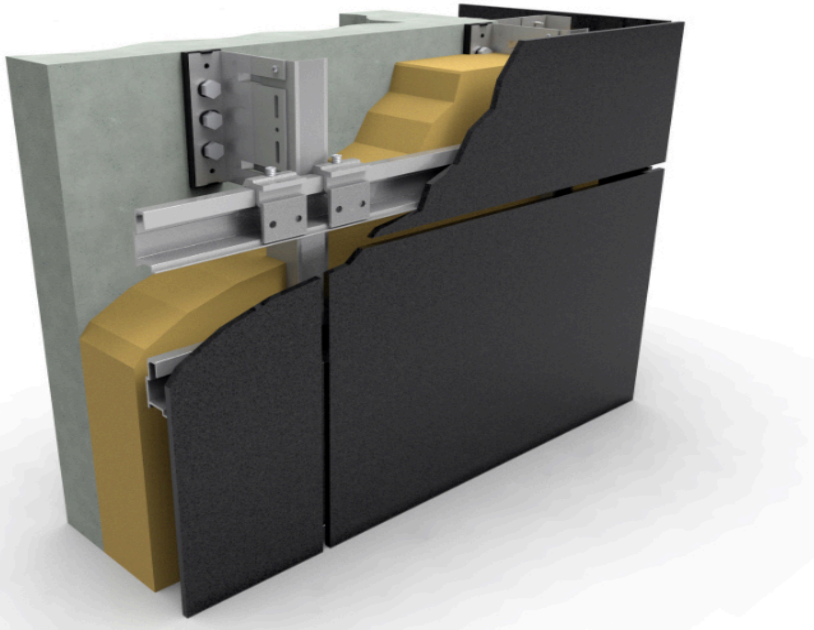


1334 Guide tracker




1333 Hanging hook

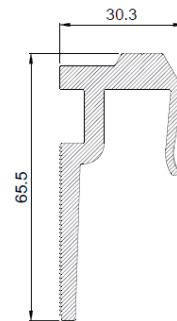

Vertical section.

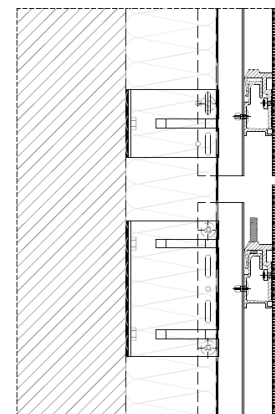

Horizontal section.

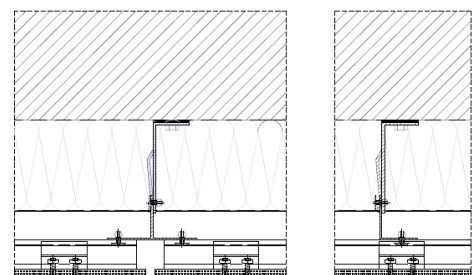

Concealed fixing with screws, clamp and guide profile on aluminium substructure.

Maximum height between fixings

Site plate space (mm)	8	10	13
2 fixings in one direction (mm)	600	750	900
3 or more fixings in one direction (mm)	750	900	1200

The maximum distance indicated in the table has been defined considering a maximum wind load of 600N/m² and a deflection of L/200.

