


COMMERCIAL TRANSPORT Profiles

Plank profiles	01
Floor profiles	14
Structure profiles	23
Cornerbacks	48
Other profiles	51



- 3911 27 x 25 mm plank terminal

Characteristics:	Weight (kg/m): 0.535	Perimeter (mm): 155	Inertia Ix (cm4): 1.90	Inertia Iy (cm4): 1.38
Compatibility: 4013, 4012, 4135, 3910				
Please consult minimum order and delivery time depending on the alloy required.				




E: 1/1



- 4012 100 x 25 mm plank

Characteristics:	Weight (kg/m): 1.615	Perimeter (mm): 554	Inertia Ix (cm4): 6.50	Inertia Iy (cm4): 72.71
Compatibility: 3911, 4013, 4135, 3910				
Please consult minimum order and delivery time depending on the alloy required.				

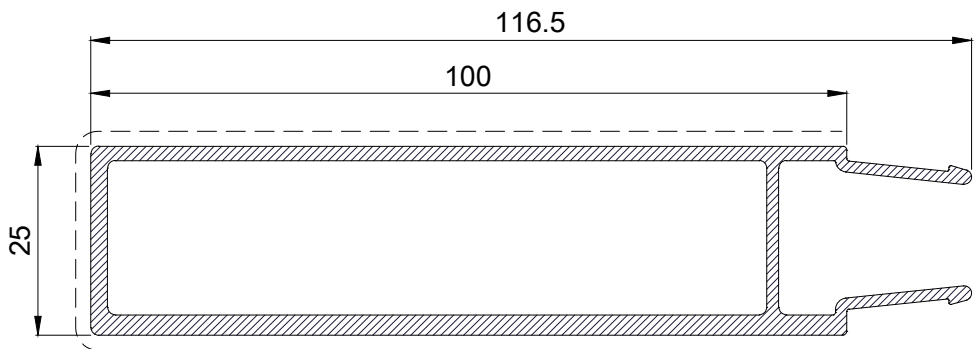


E: 1/1



- 3911 27 x 25 mm plank terminal

Characteristics:	Weight (kg/m): 0.535	Perimeter (mm): 155	Inertia Ix (cm4): 1.90	Inertia Iy (cm4): 1.38
Compatibility: 4013, 4012, 4135, 3910				
Please consult minimum order and delivery time depending on the alloy required.				

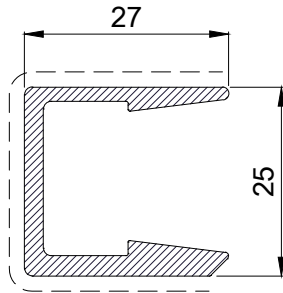


E: 1/1



- 4012 100 x 25 mm plank

Characteristics:	Weight (kg/m): 1.615	Perimeter (mm): 554	Inertia Ix (cm4): 6.50	Inertia Iy (cm4): 72.71
Compatibility: 3911, 4013, 4135, 3910				
Please consult minimum order and delivery time depending on the alloy required.				

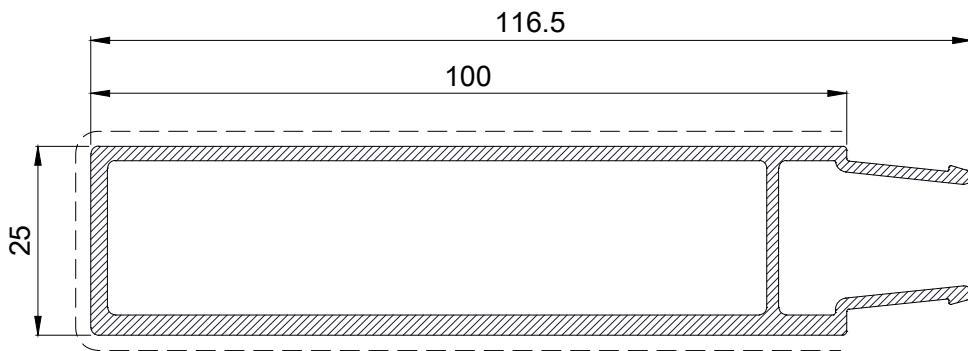


E: 1/1




- 4135 241 x 25 mm plank

Characteristics:	Weight (kg/m): 3.707	Perimeter (mm): 1114	Inertia Ix (cm4): 706.71	Inertia Iy (cm4): 15.62
Compatibility: 3911, 4012, 4013, 3910				
Please consult minimum order and delivery time depending on the alloy required.				

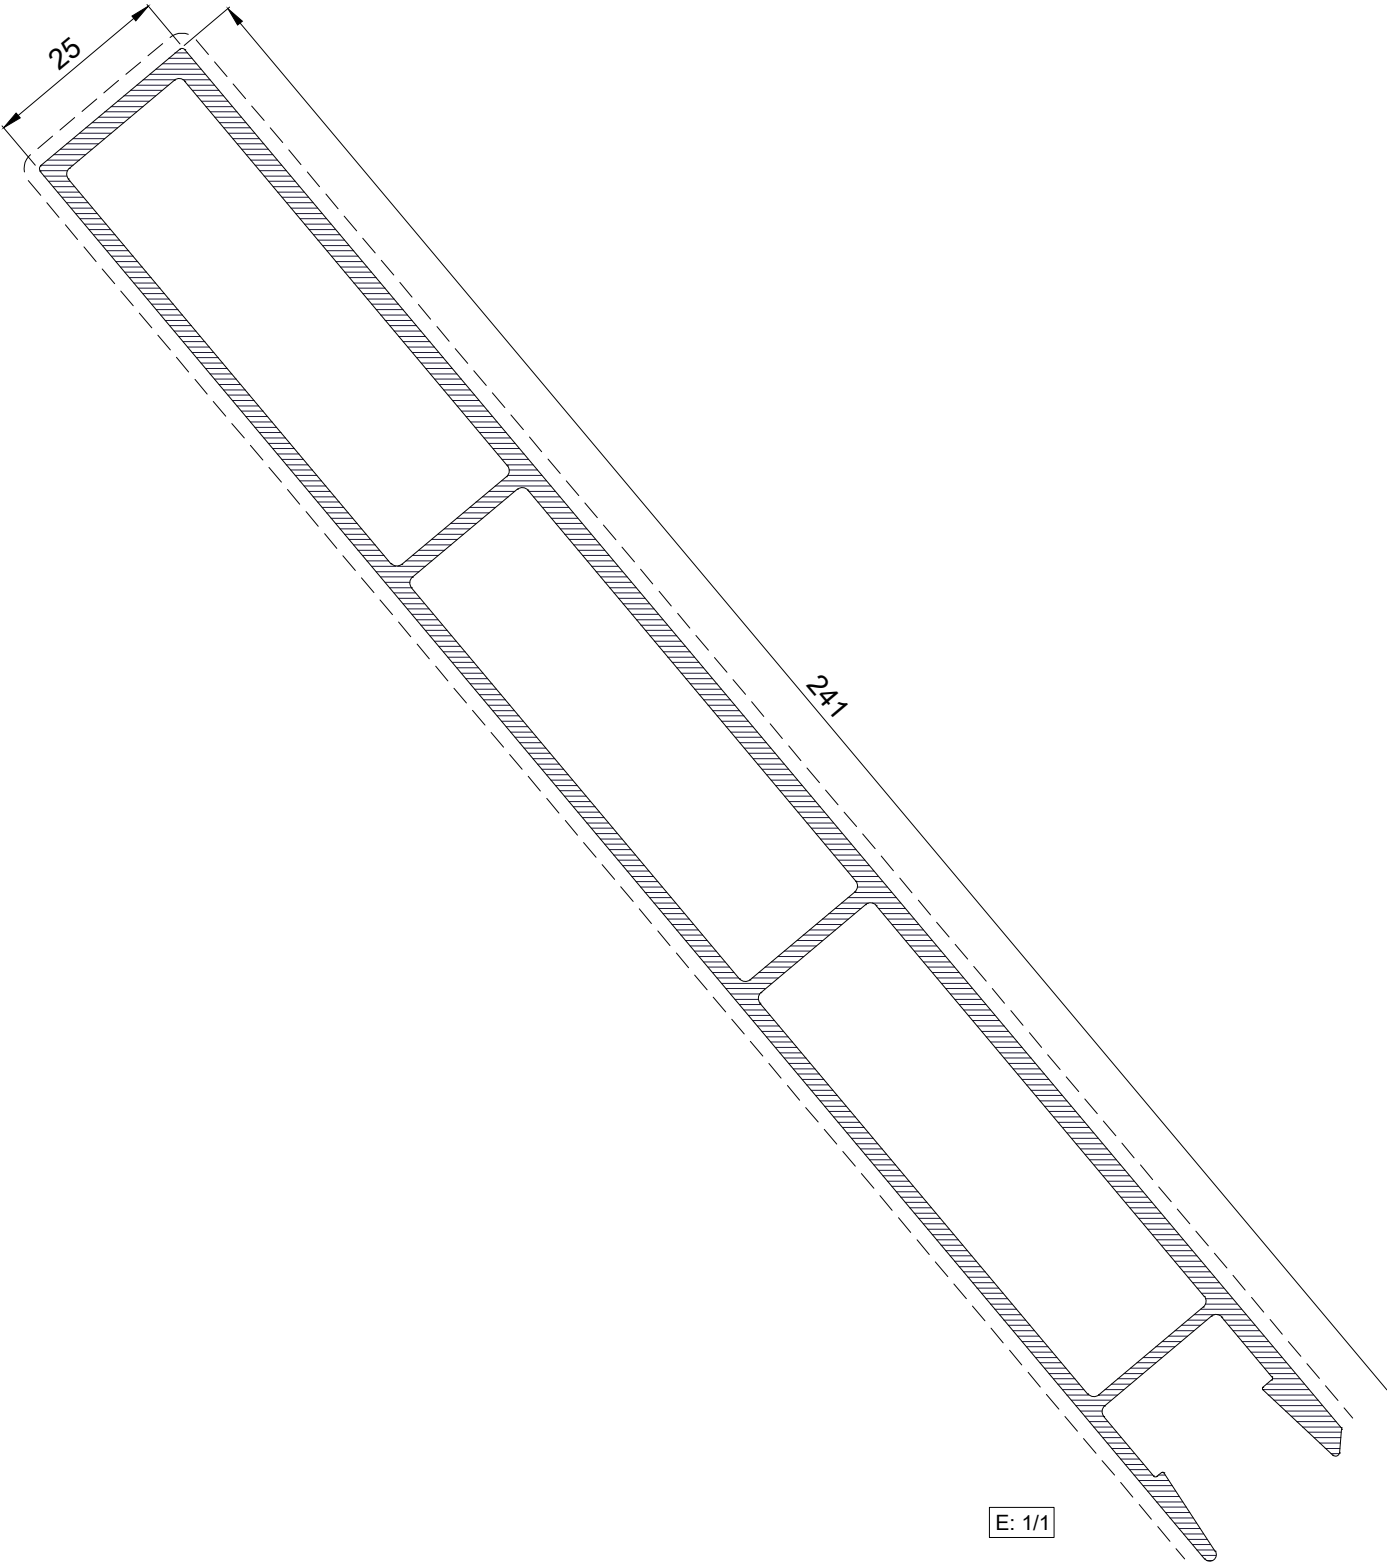


- 3910 250 x 25 mm plank

Characteristics:	Weight (kg/m): 3.750	Perimeter (mm): 1226	Inertia Ix (cm4): 813,06	Inertia Iy (cm4): 15.64
Compatibility: 3911, 4012, 4013, 4135				
Please consult minimum order and delivery time depending on the alloy required.				

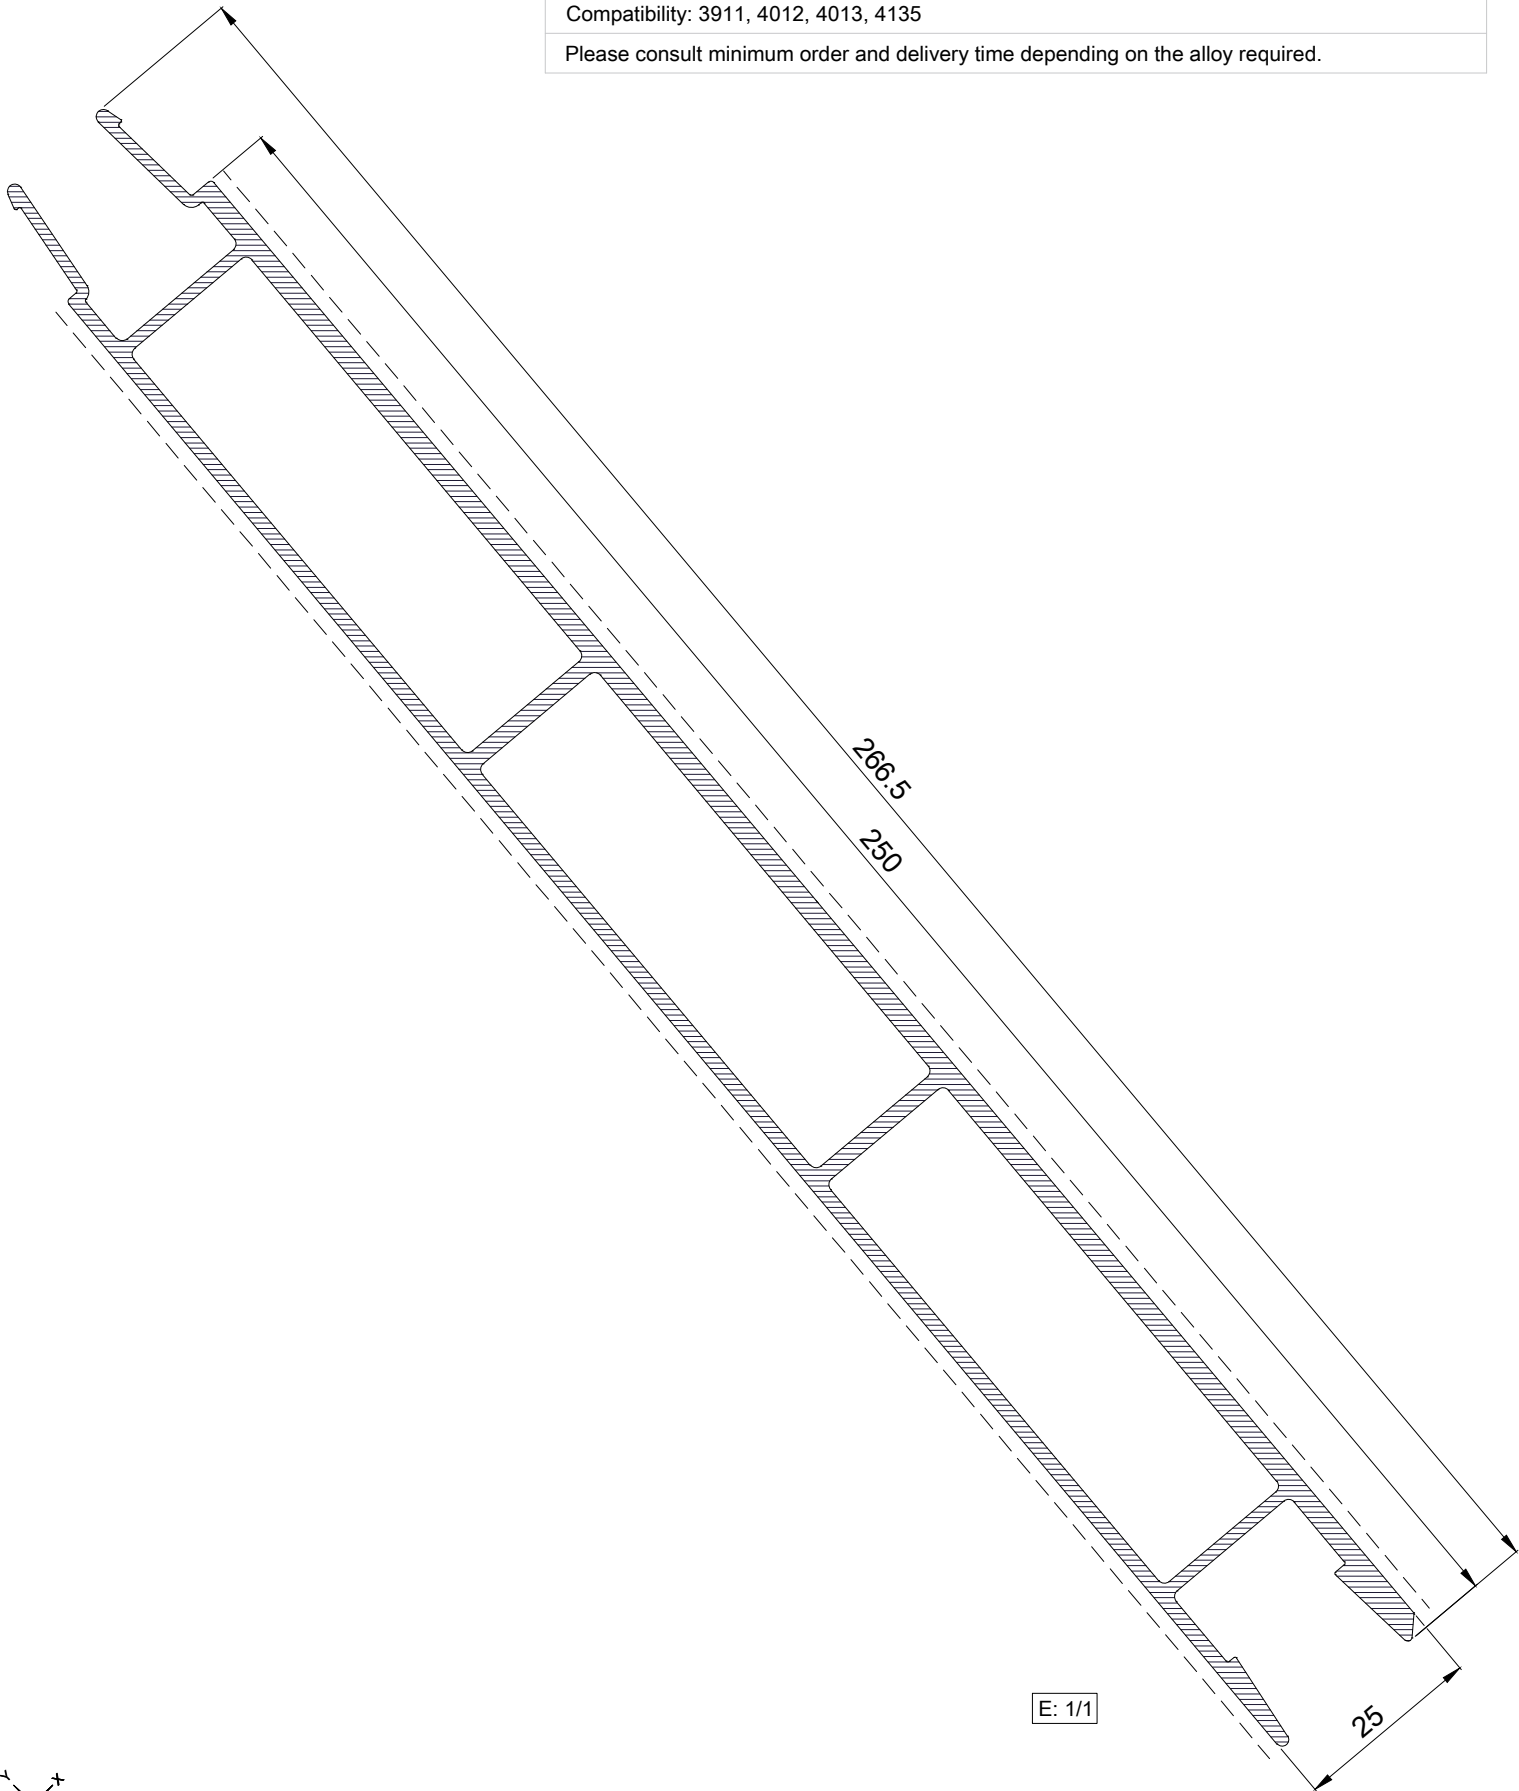

- 4033 100 x 25 mm plank


Characteristics:	Weight (kg/m): 1.253	Perimeter (mm): 612	Inertia Ix (cm4): 4.98	Inertia Iy (cm4): 66.62
Compatibility: 4032, 4239, 4034, 4035				
Please consult minimum order and delivery time depending on the alloy required.				

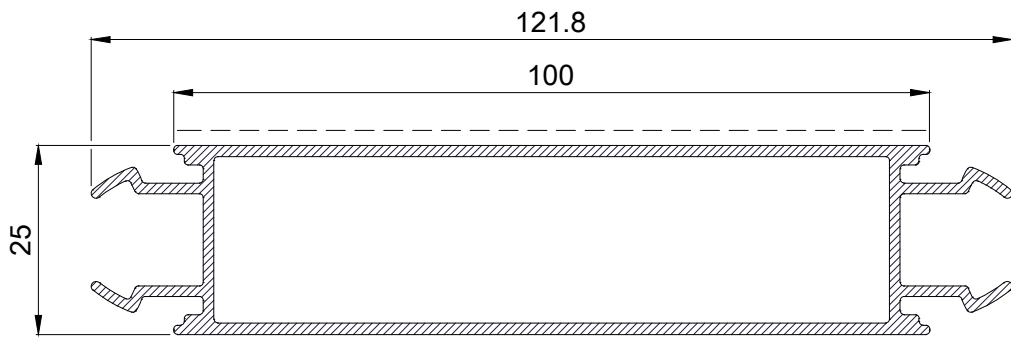

E: 1/1

- 4032 100 x 25 mm plank

Characteristics:	Weight (kg/m): 1.223	Perimeter (mm): 567	Inertia Ix (cm4): 5.08	Inertia Iy (cm4): 53.05
Compatibility: 4033, 4239, 4034, 4035				
Please consult minimum order and delivery time depending on the alloy required.				

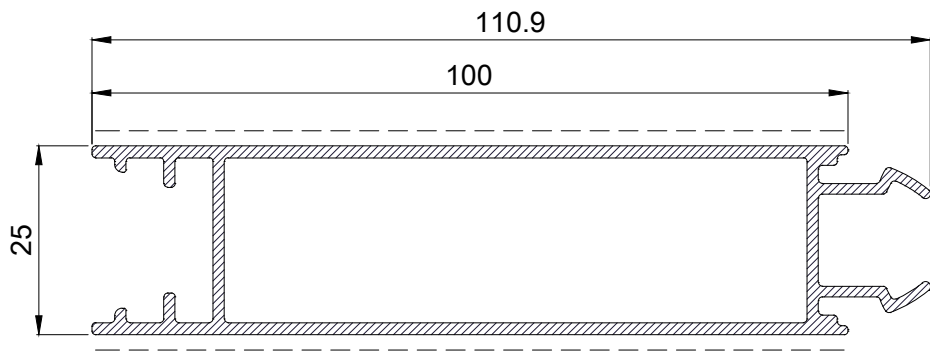


E: 1/1



- 4239 100 x 25 mm plank

Characteristics:	Weight (kg/m): 1.436	Perimeter (mm): 555	Inertia Ix (cm4): 5.73	Inertia Iy (cm4): 69.03
Compatibility: 4033, 4032, 4034, 4035				
Please consult minimum order and delivery time depending on the alloy required.				

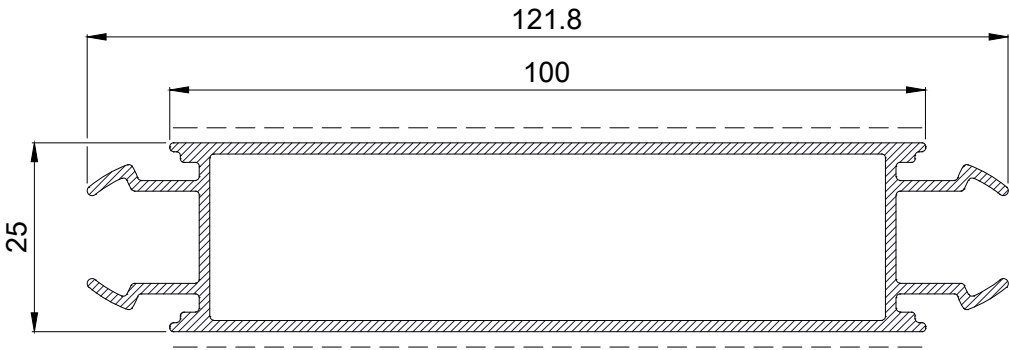


E: 1/1



- 4034 199.4 x 25 mm plank

Characteristics:	Weight (kg/m): 2.306	Perimeter (mm): 1043	Inertia Ix (cm4): 339,28	Inertia Iy (cm4): 9,78
Compatibility: 4033, 4032, 4239, 4035				
Please consult minimum order and delivery time depending on the alloy required.				

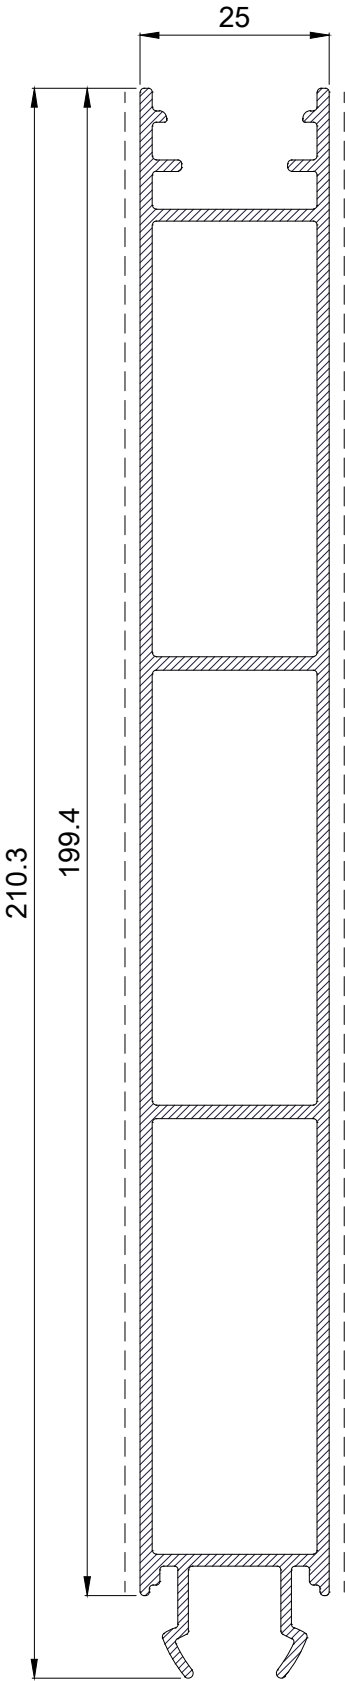


E: 1/1



- 4035 199.4 x 25 mm plank

Characteristics:	Weight (kg/m): 2.219	Perimeter (mm): 976	Inertia Ix (cm4): 305,58	Inertia Iy (cm4): 9,53
Compatibility: 4033,4032, 4239, 4034				
Please consult minimum order and delivery time depending on the alloy required.				

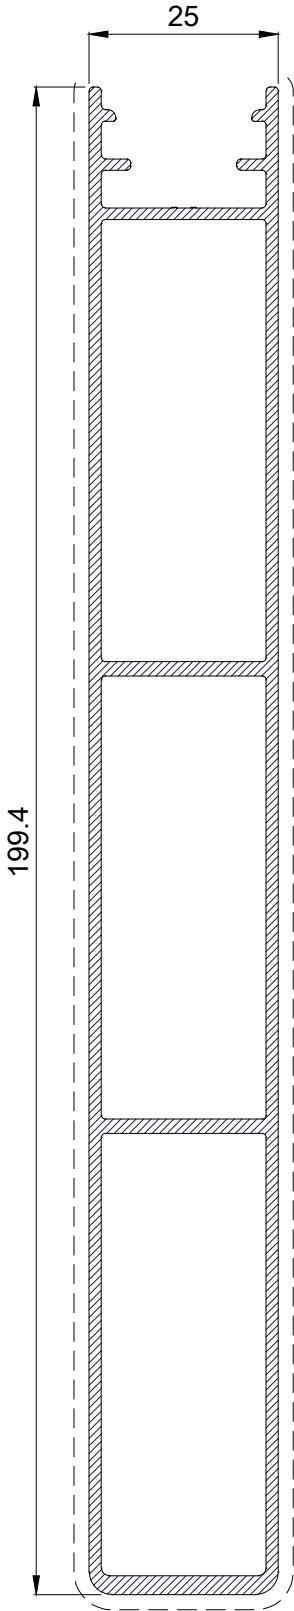


E: 1/1




- 4577 250 x 30 mm plank

Characteristics:	Weight (kg/m): 3.807	Perimeter (mm): 1262	Inertia Ix (cm4): 818,01	Inertia Iy (cm4): 23,75
Please consult minimum order and delivery time depending on the alloy required.				

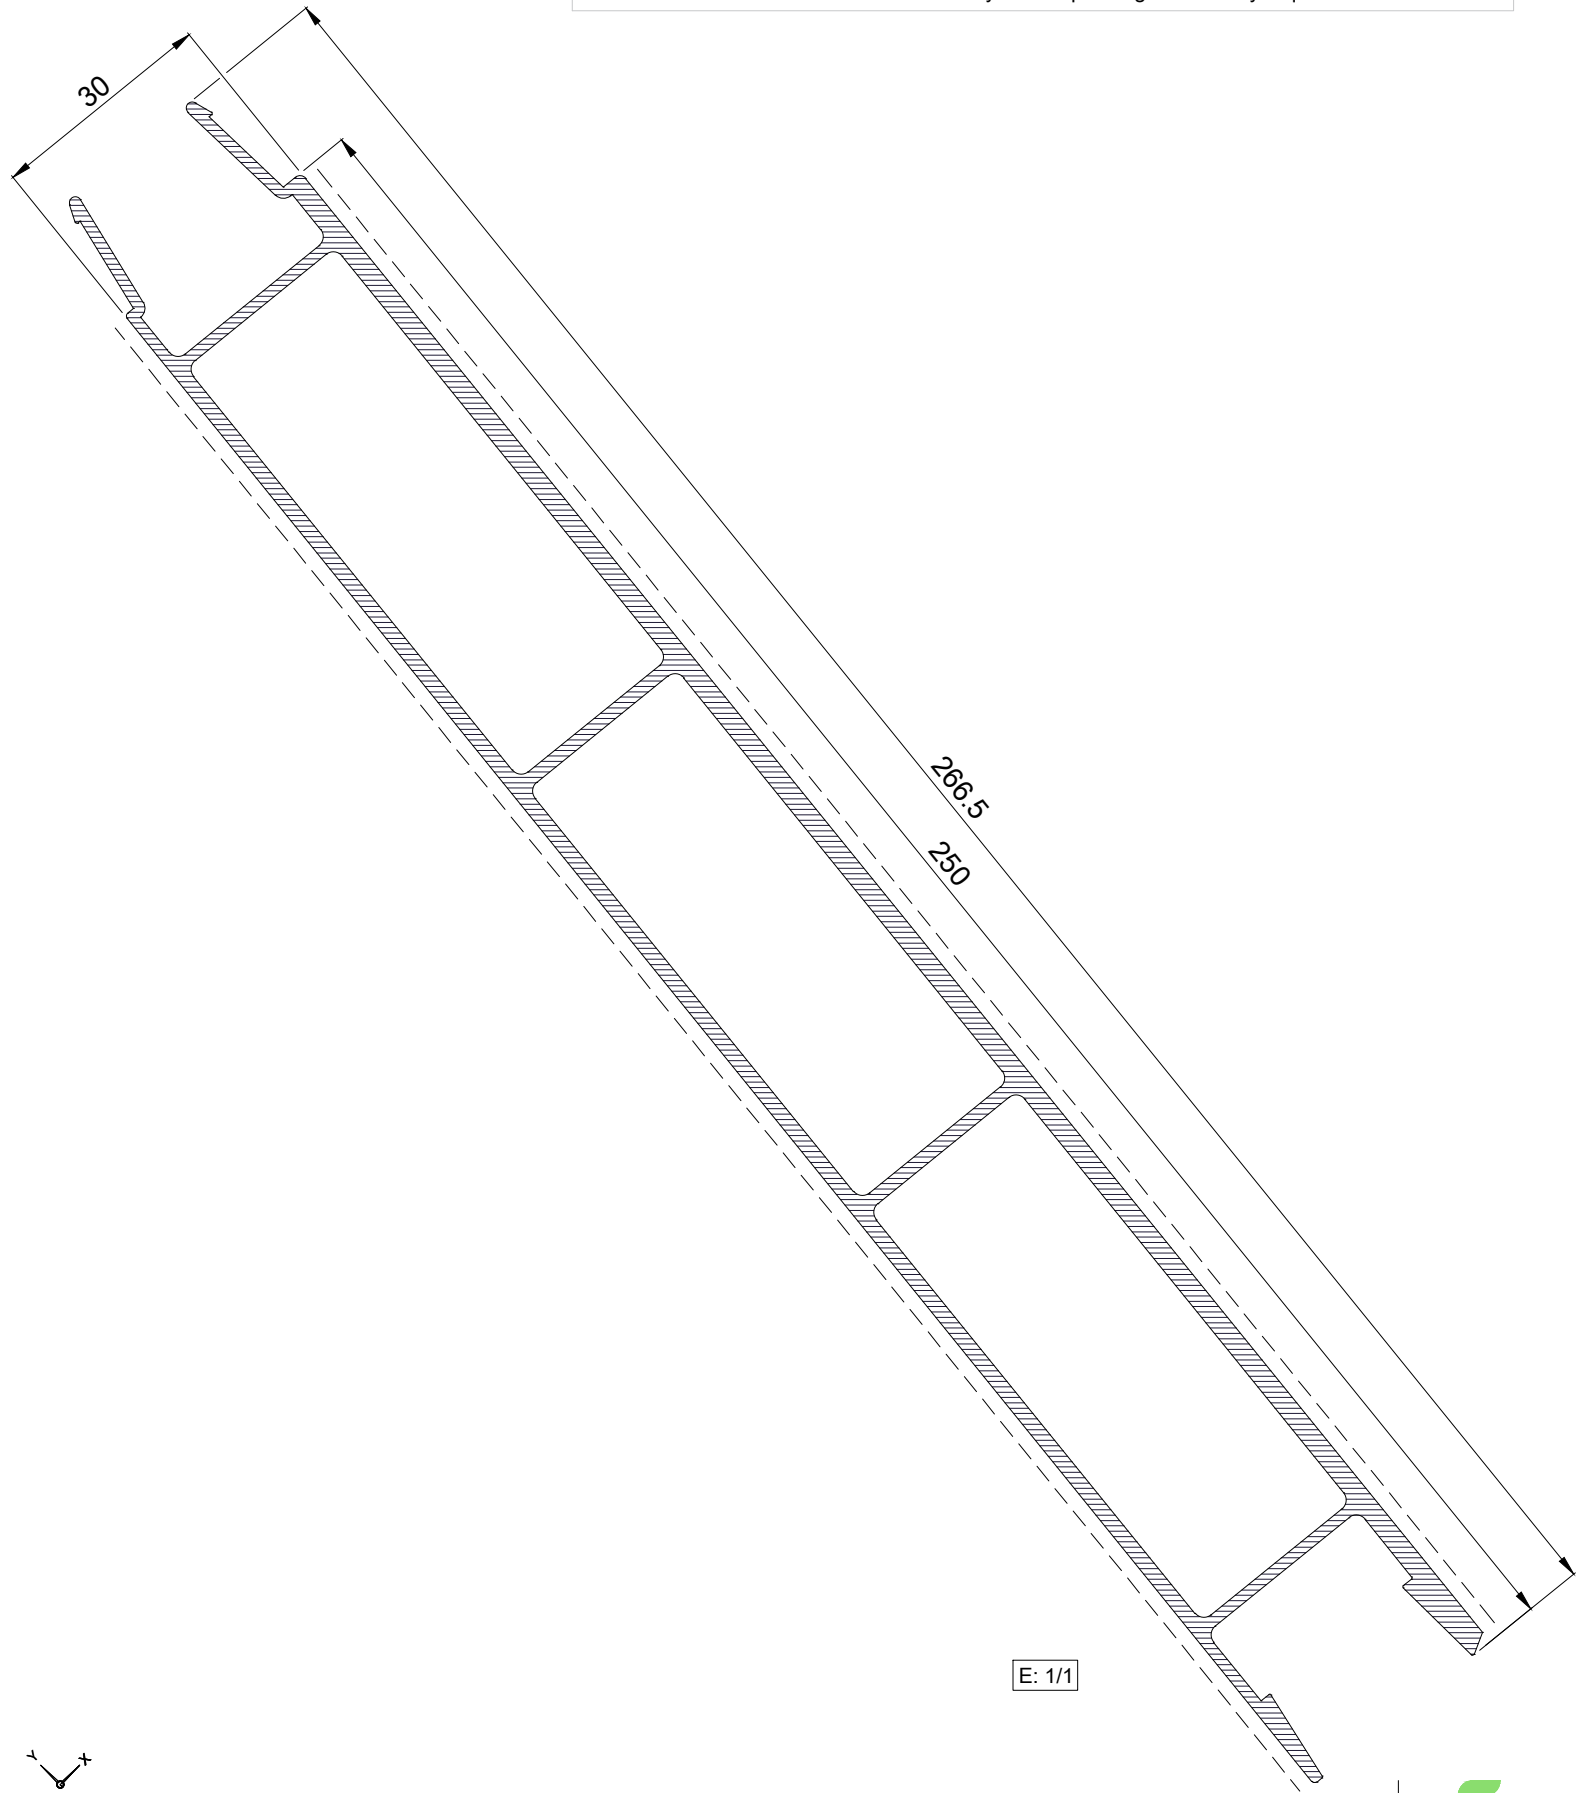

- 4421 350 x 30 mm plank

Characteristics:	Weight (kg/m): 4.949	Perimeter (mm): 1664	Inertia Ix (cm4): 2110,17	Inertia Iy (cm4): 31,83
Please consult minimum order and delivery time depending on the alloy required.				

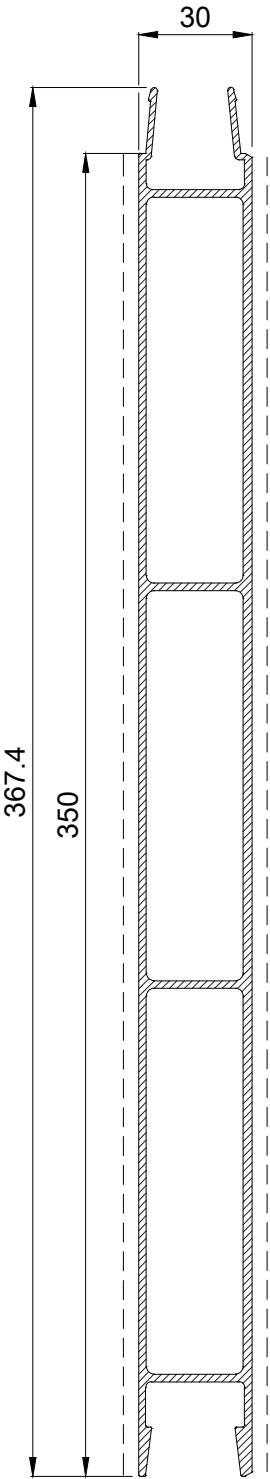


E: 1/2



- 4586 500 x 29.5 plank

Characteristics:	Weight (kg/m): 6.950	Perimeter (mm): 2351	Inertia Ix (cm4): 5943,51	Inertia Iy (cm4): 43,30
Please consult minimum order and delivery time depending on the alloy required.				

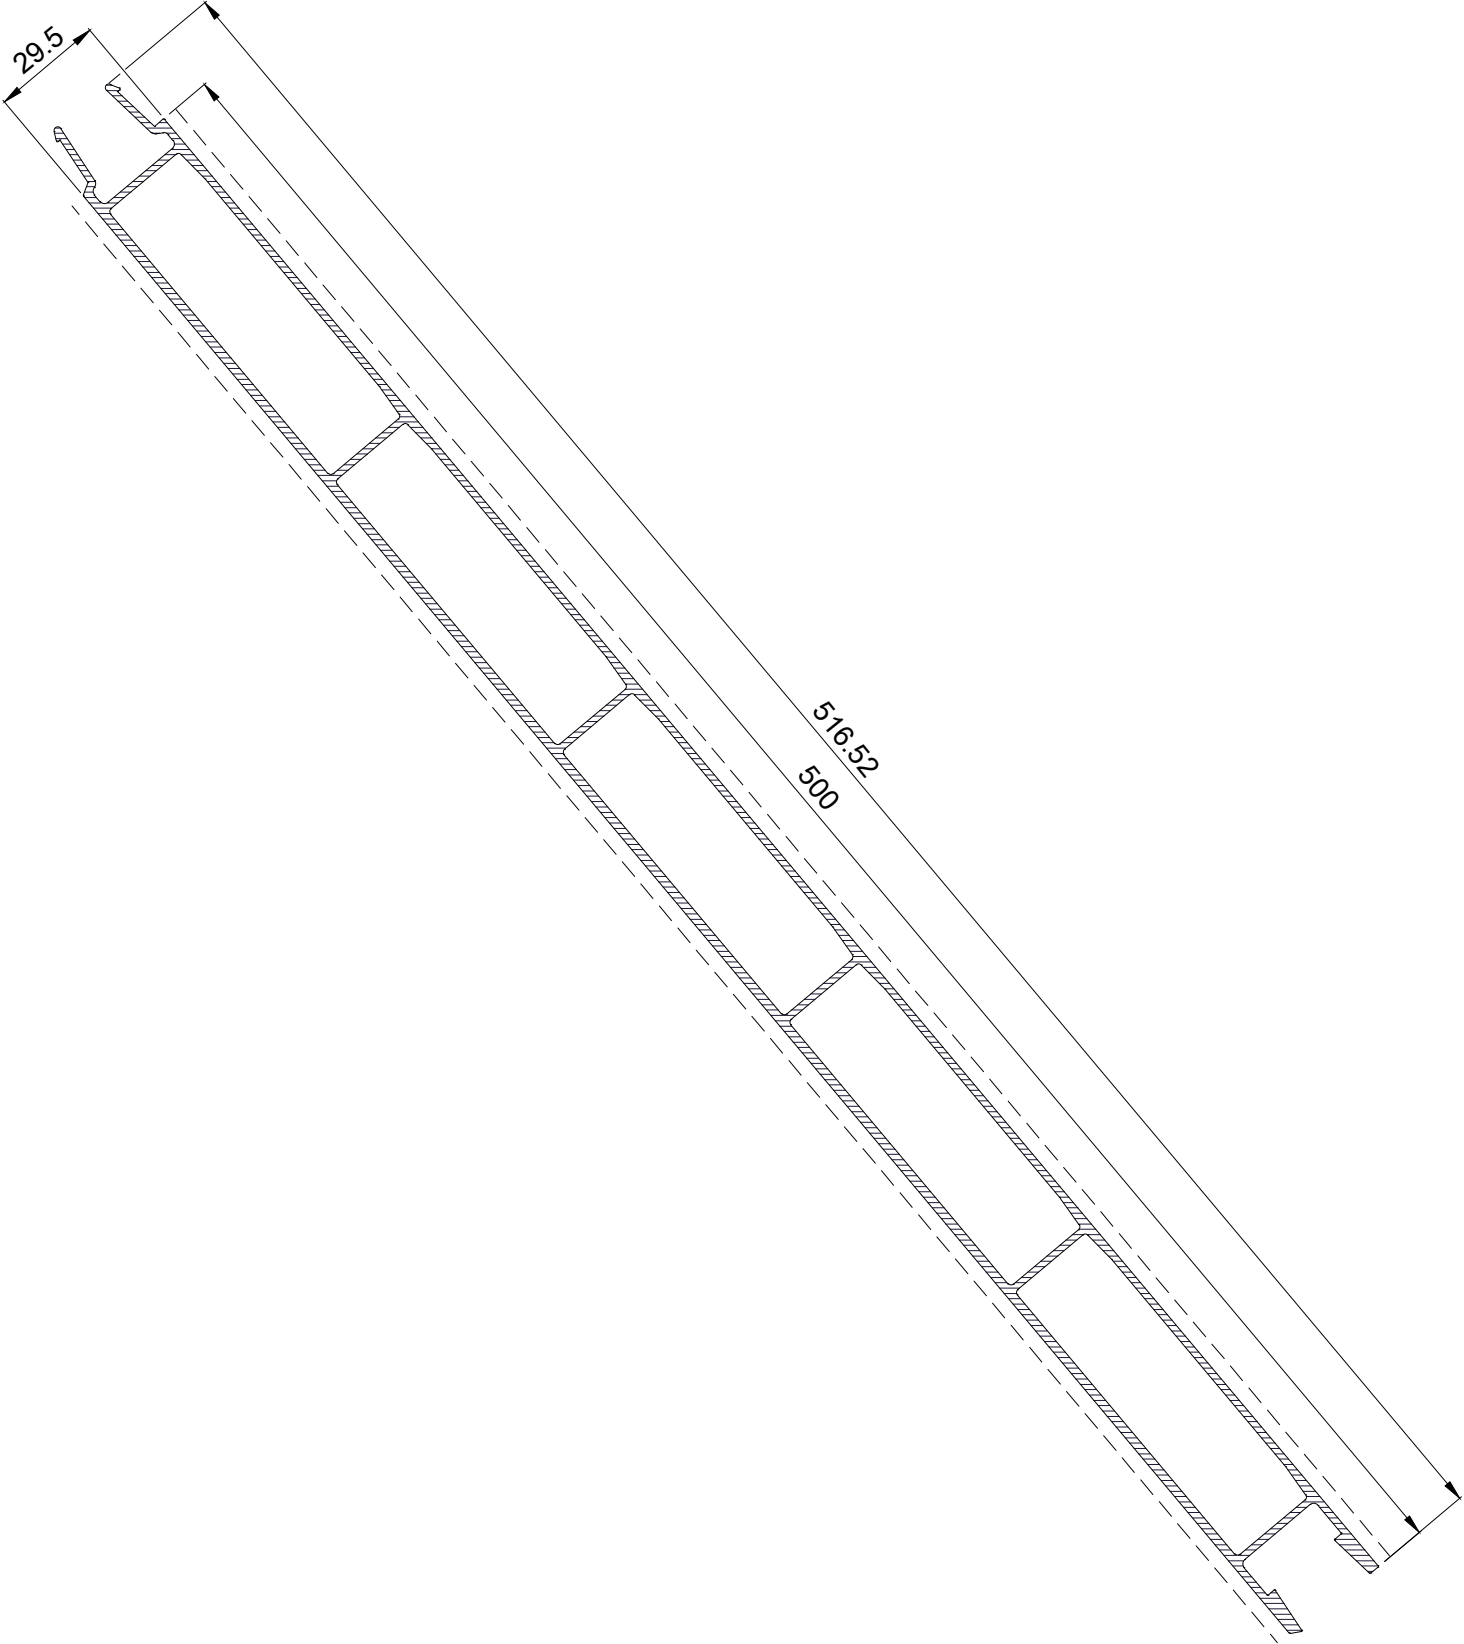


E: 1/2




- 1416 120 x 25 mm plank

Characteristics:	Weight (kg/m): 1.245	Perimeter (mm): 610	Inertia Ix (cm4): 5,36	Inertia Iy (cm4): 66,06
Please consult minimum order and delivery time depending on the alloy required.				

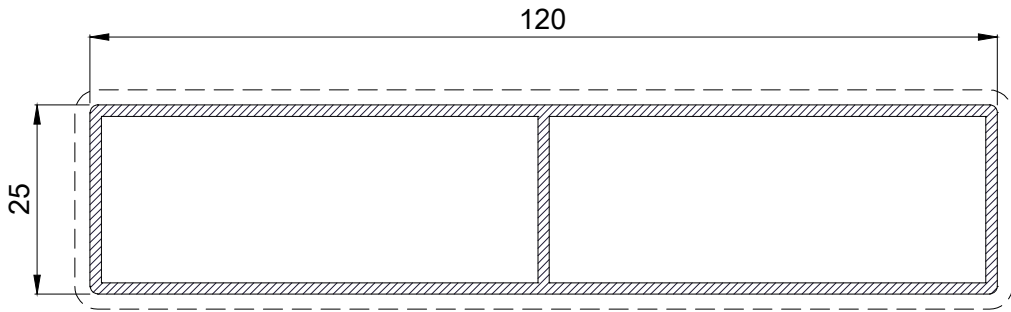


- 3724 150 x 25 mm plank

Characteristics:	Weight (kg/m): 1.169	Perimeter (mm): 494	Inertia Ix (cm4): 3,54	Inertia Iy (cm4): 120,42
Please consult minimum order and delivery time depending on the alloy required.				

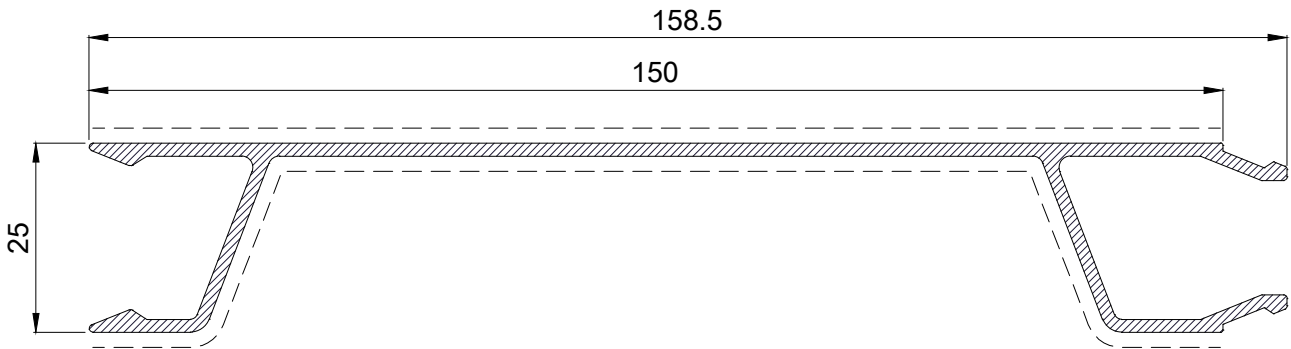

- 12099 140 x 25 mm plank

Characteristics:	Weight (kg/m): 1.531	Perimeter (mm): 748	Inertia Ix (cm4): 6,39	Inertia Iy (cm4): 122,01
Please consult minimum order and delivery time depending on the alloy required.				

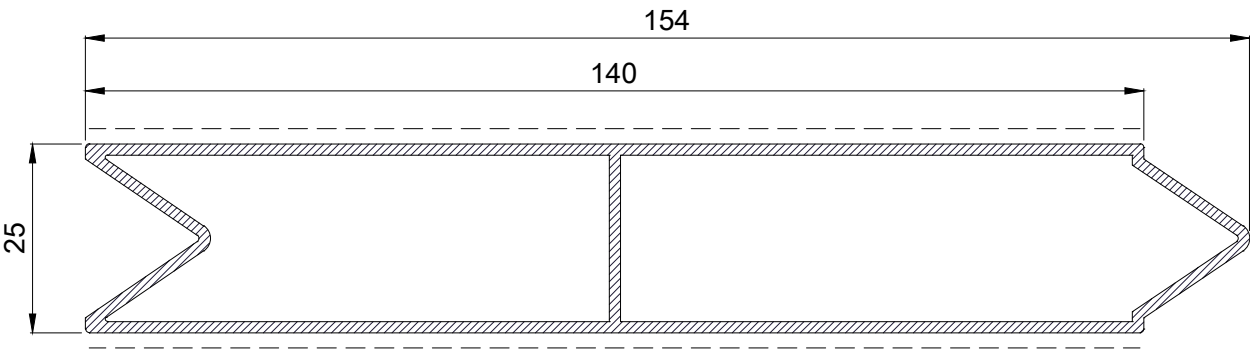


E: 1/1



- 4014 Single seal ribbed floor slat

Characteristics:	Weight (kg/m): 2.668	Perimeter (mm): 484	Inertia Ix (cm4): 14,91	Inertia Iy (cm4): 135,74
Please consult minimum order and delivery time depending on the alloy required.				

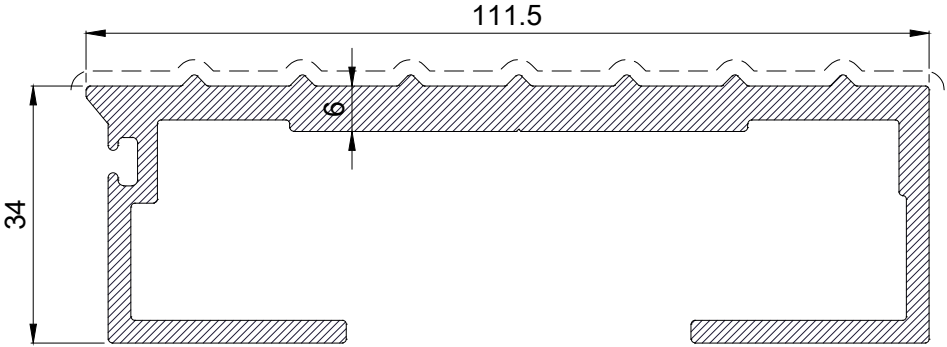


E: 1/1



- 4018 Double seal ribbed floor slat

Characteristics:	Weight (kg/m): 2.714	Perimeter (mm): 501	Inertia Ix (cm4): 15,02	Inertia Iy (cm4): 140,05
Please consult minimum order and delivery time depending on the alloy required.				

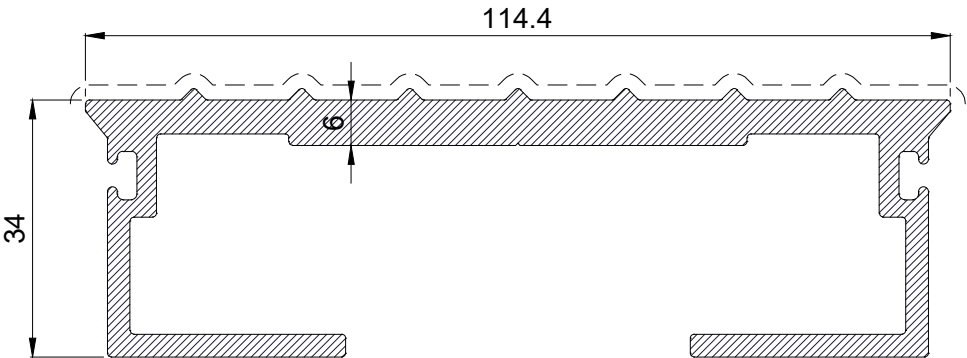


E: 1/1



- 4589 Single seal ribbed floor slat

Characteristics:	Weight (kg/m): 3.197	Perimeter (mm): 483	Inertia Ix (cm4): 17,50	Inertia Iy (cm4): 153,76
Please consult minimum order and delivery time depending on the alloy required.				

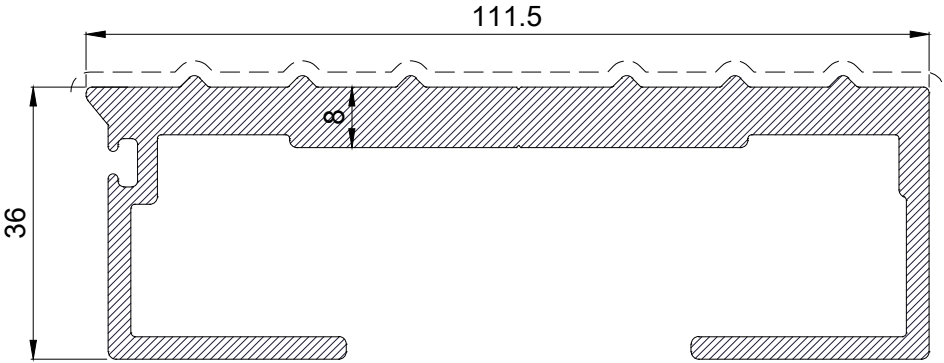


E: 1/1



- 4343 Single seal ribbed floor slat

Characteristics:	Weight (kg/m): 3.818	Perimeter (mm): 487	Inertia Ix (cm4): 20,08	Inertia Iy (cm4): 176,04
Please consult minimum order and delivery time depending on the alloy required.				

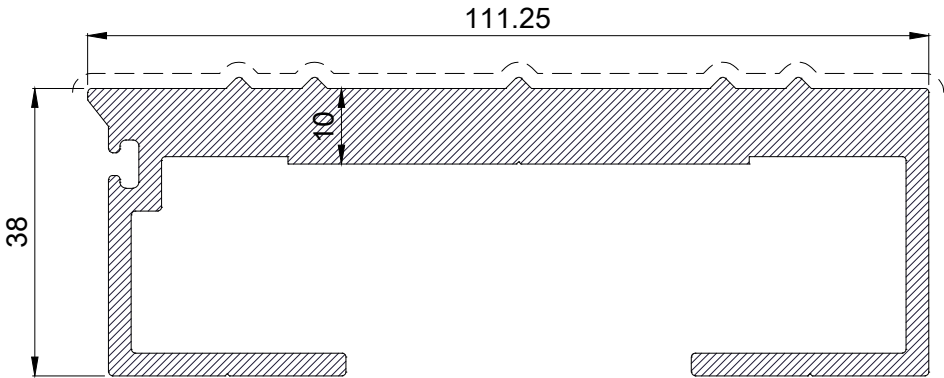


E: 1/1



- 4052 Single seal ribbed floor slat

Characteristics:	Weight (kg/m): 4.498	Perimeter (mm): 522	Inertia Ix (cm4): 25,37	Inertia Iy (cm4): 209,68
Please consult minimum order and delivery time depending on the alloy required.				

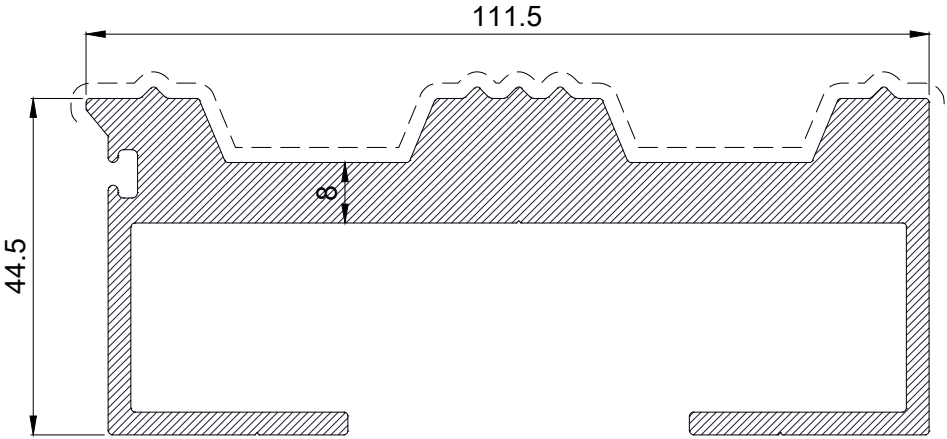


E: 1/1



- 4132 Single seal ribbed floor slat

Characteristics:	Weight (kg/m): 3.564	Perimeter (mm): 549	Inertia Ix (cm4): 17,54	Inertia Iy (cm4): 183,71
Please consult minimum order and delivery time depending on the alloy required.				

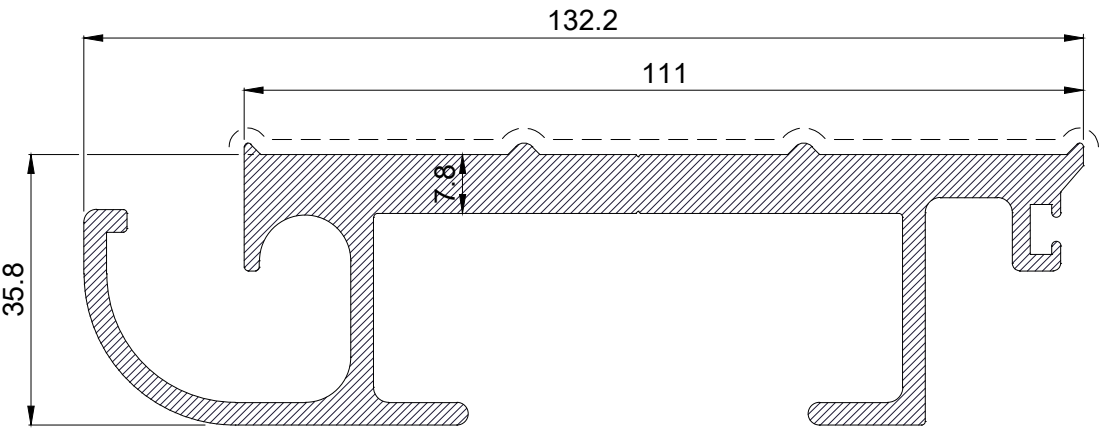


E: 1/1



- 4385 Single seal ribbed floor slat

Characteristics:	Weight (kg/m): 2.276	Perimeter (mm): 414	Inertia Ix (cm4): 10,80	Inertia Iy (cm4): 88,92
Please consult minimum order and delivery time depending on the alloy required.				

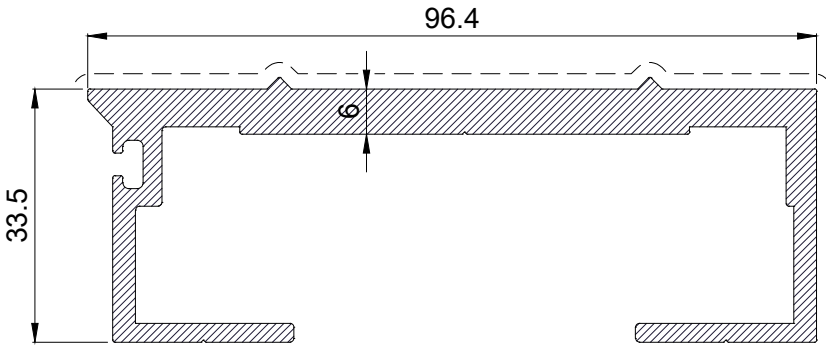


E: 1/1



- 4595 Double seal ribbed floor slat

Characteristics:	Weight (kg/m): 2.317	Perimeter (mm): 429	Inertia Ix (cm4): 10,87	Inertia Iy (cm4): 91,68
Please consult minimum order and delivery time depending on the alloy required.				

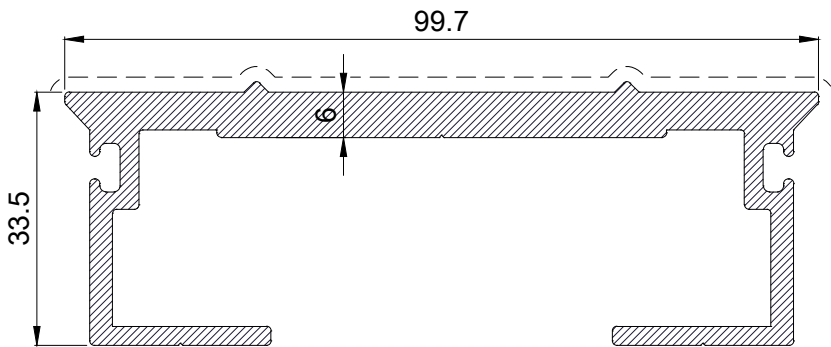


E: 1/1



- 4596 Finishing

Characteristics:	Weight (kg/m): 1.323	Perimeter (mm): 214	Inertia Ix (cm4): 5,11	Inertia Iy (cm4): 18,47
Please consult minimum order and delivery time depending on the alloy required.				

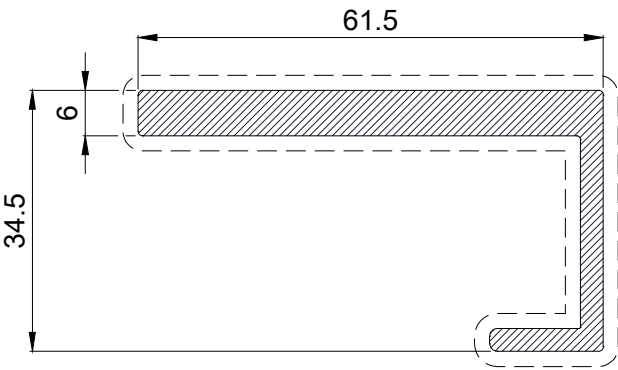


E: 1/1



- 4021 Floor profile

Characteristics:	Weight (kg/m): 7.744	Perimeter (mm): 1608	Inertia Ix (cm4): 2297,22	Inertia Iy (cm4): 77,46
Please consult minimum order and delivery time depending on the alloy required.				

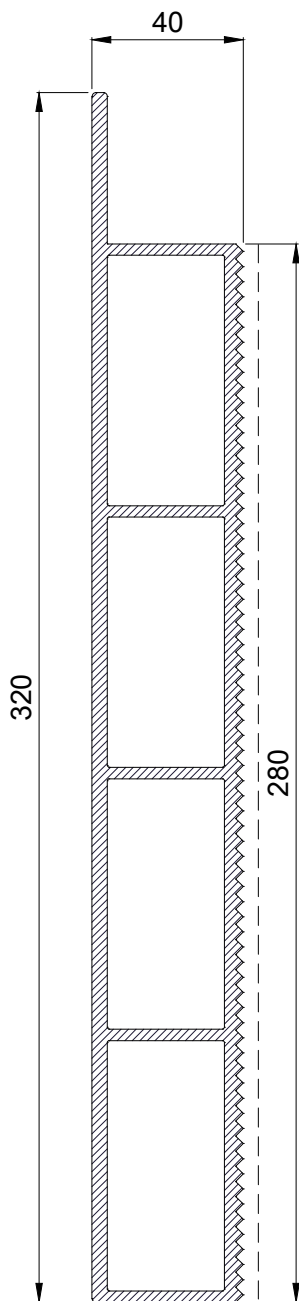


E: 1/2




- 4340 Floor profile

Characteristics:	Weight (kg/m): 3.888	Perimeter (mm): 1334	Inertia Ix (cm4): 709,90	Inertia Iy (cm4): 42,40
Please consult minimum order and delivery time depending on the alloy required.				

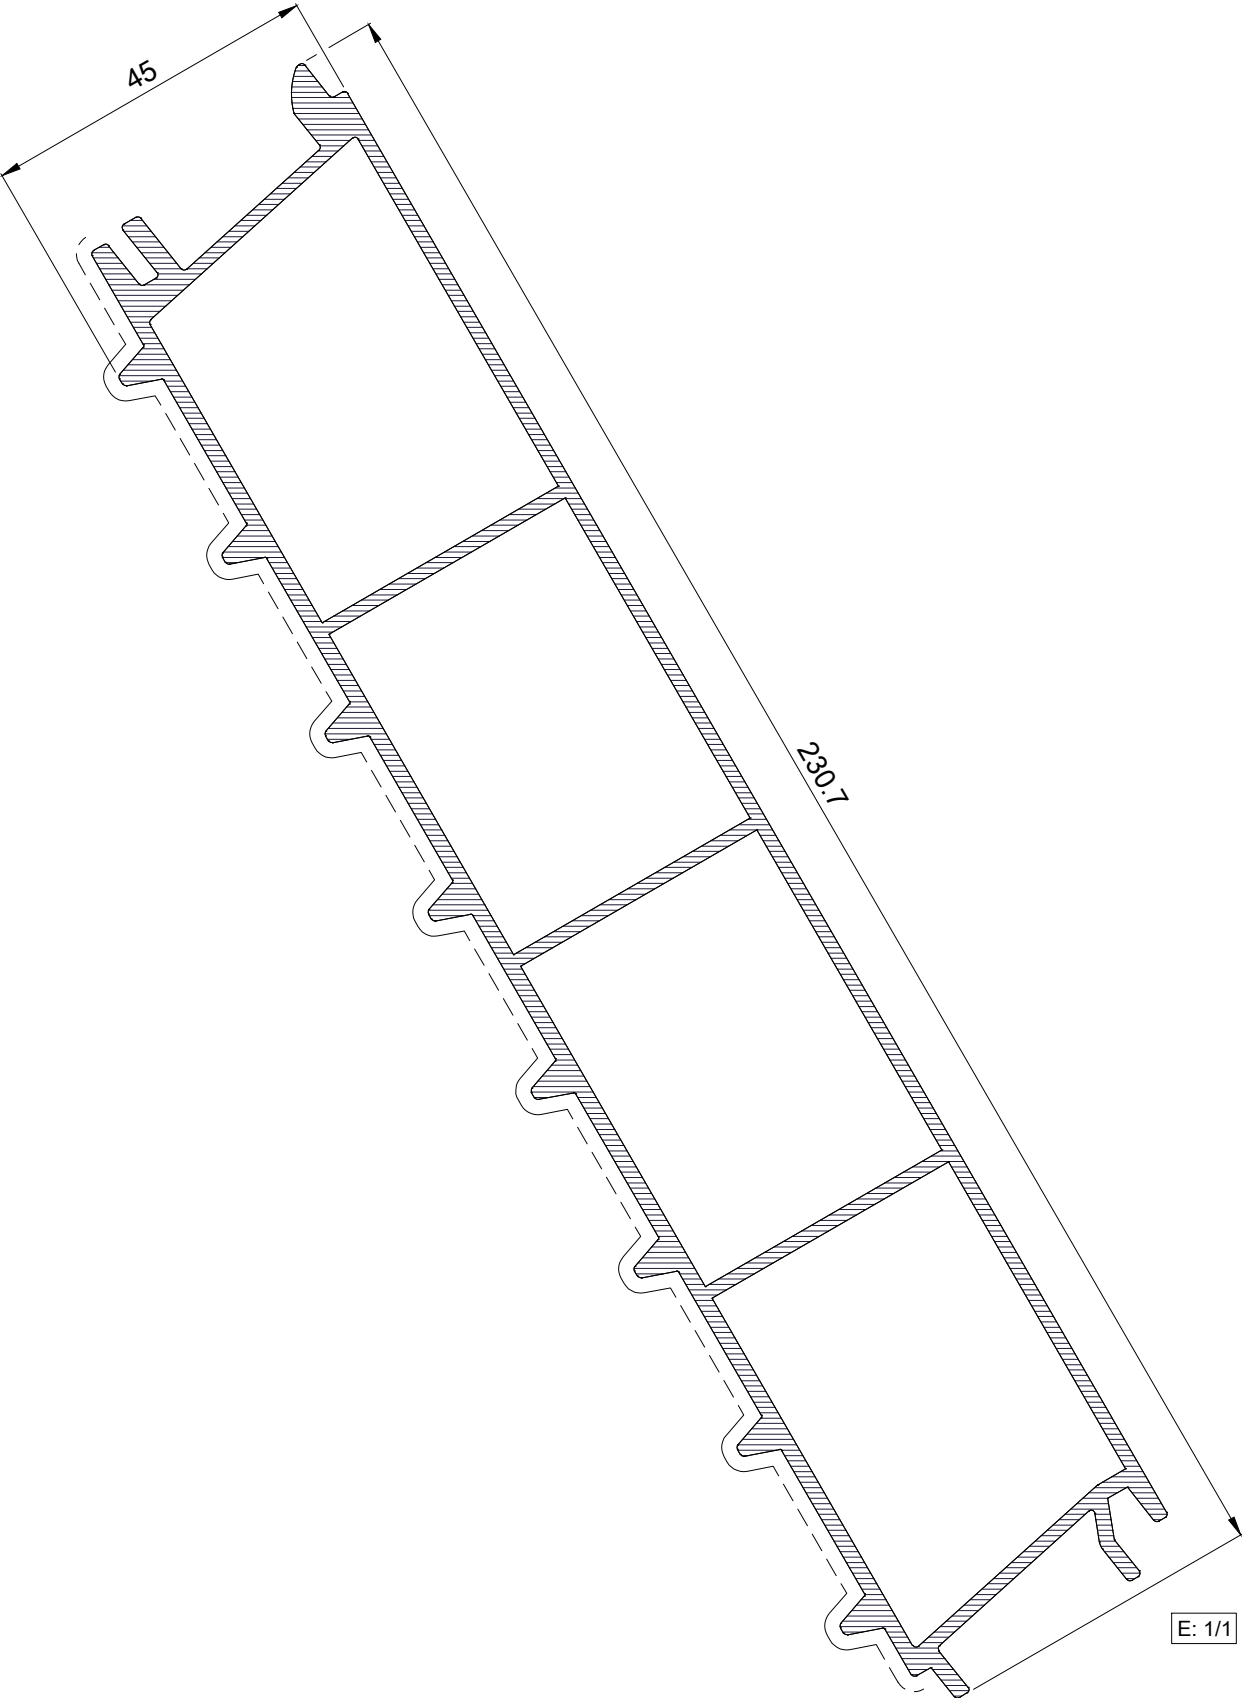

- 4357 Floor profile

Characteristics:	Weight (kg/m): 6.458	Perimeter (mm): 1751	Inertia Ix (cm4): 2362,13	Inertia Iy (cm4): 60,48
Please consult minimum order and delivery time depending on the alloy required.				

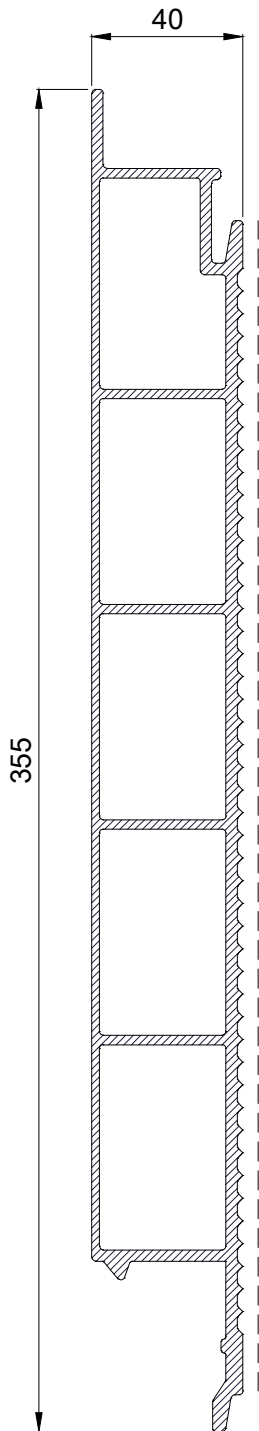


E: 1/2



- 4057 Flap


Characteristics:	Weight (kg/m): 3.240	Perimeter (mm): 446	Inertia Ix (cm4): 56,22	Inertia Iy (cm4): 35,97
Please consult minimum order and delivery time depending on the alloy required.				

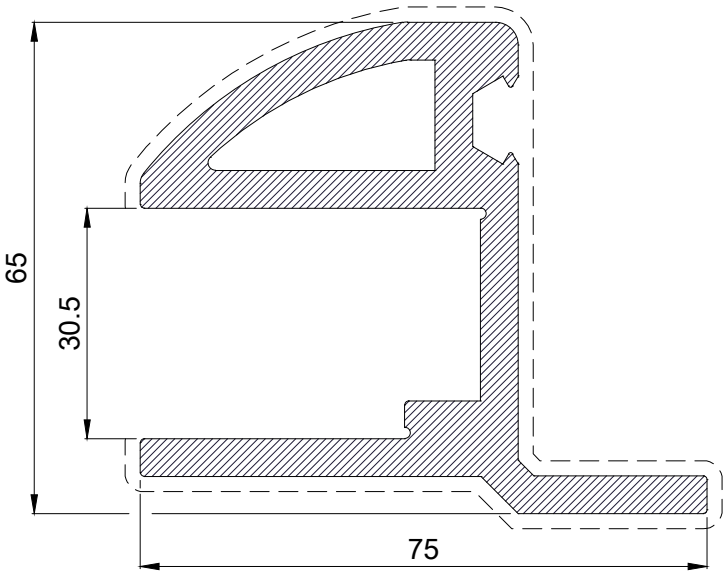

E: 1/1

- 4114 Profile

Characteristics:	Weight (kg/m): 11.529	Perimeter (mm): 763	Inertia Ix (cm4): 31,49	Inertia Iy (cm4): 75,31
Please consult minimum order and delivery time depending on the alloy required.				

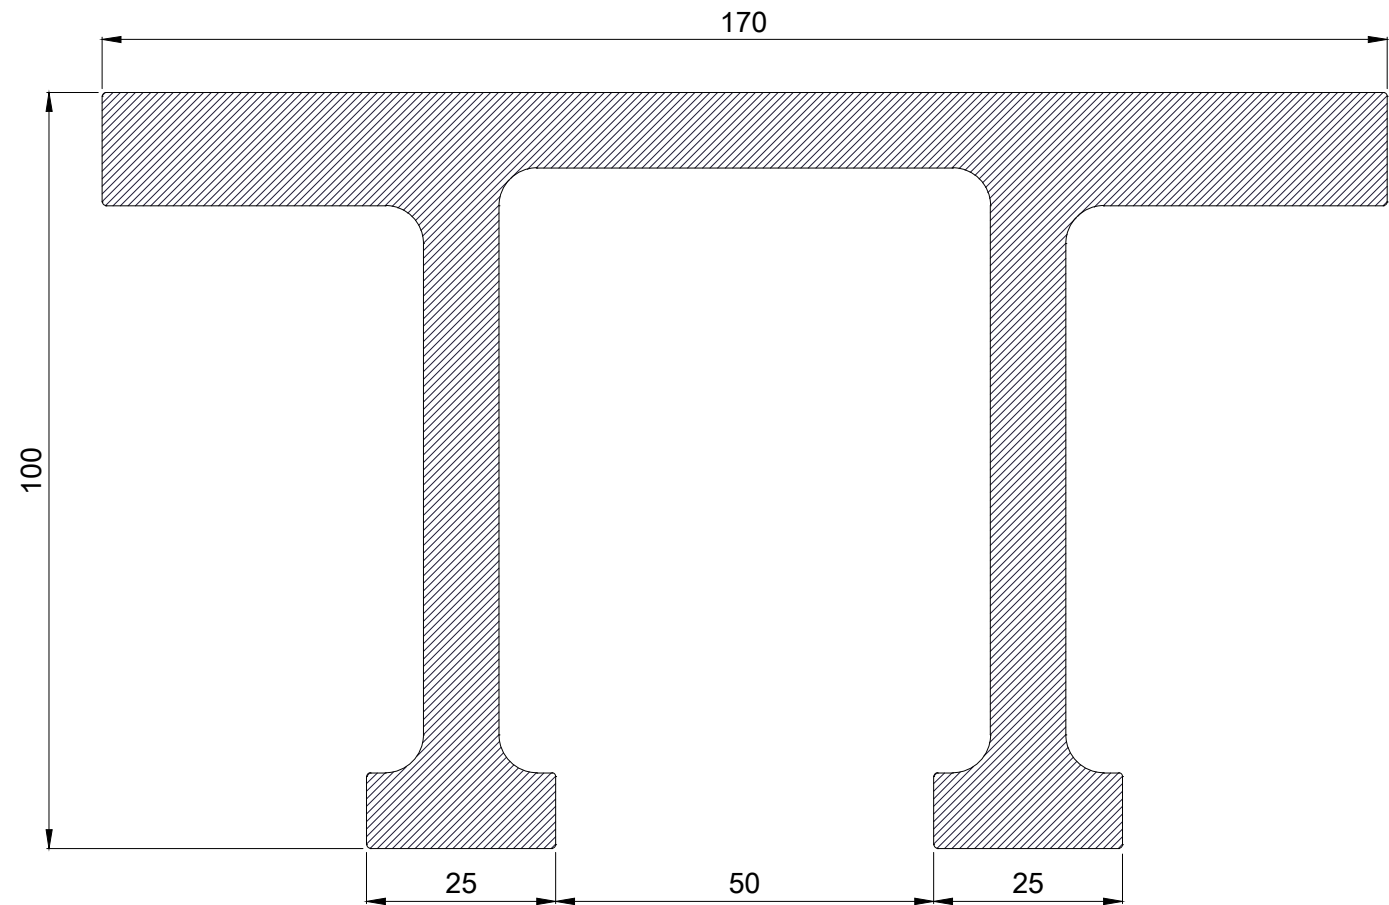


E: 1/1



- 4115 Profile

Characteristics:	Weight (kg/m): 4.698	Perimeter (mm): 683	Inertia Ix (cm4): 331,54	Inertia Iy (cm4): 198,56
Please consult minimum order and delivery time depending on the alloy required.				

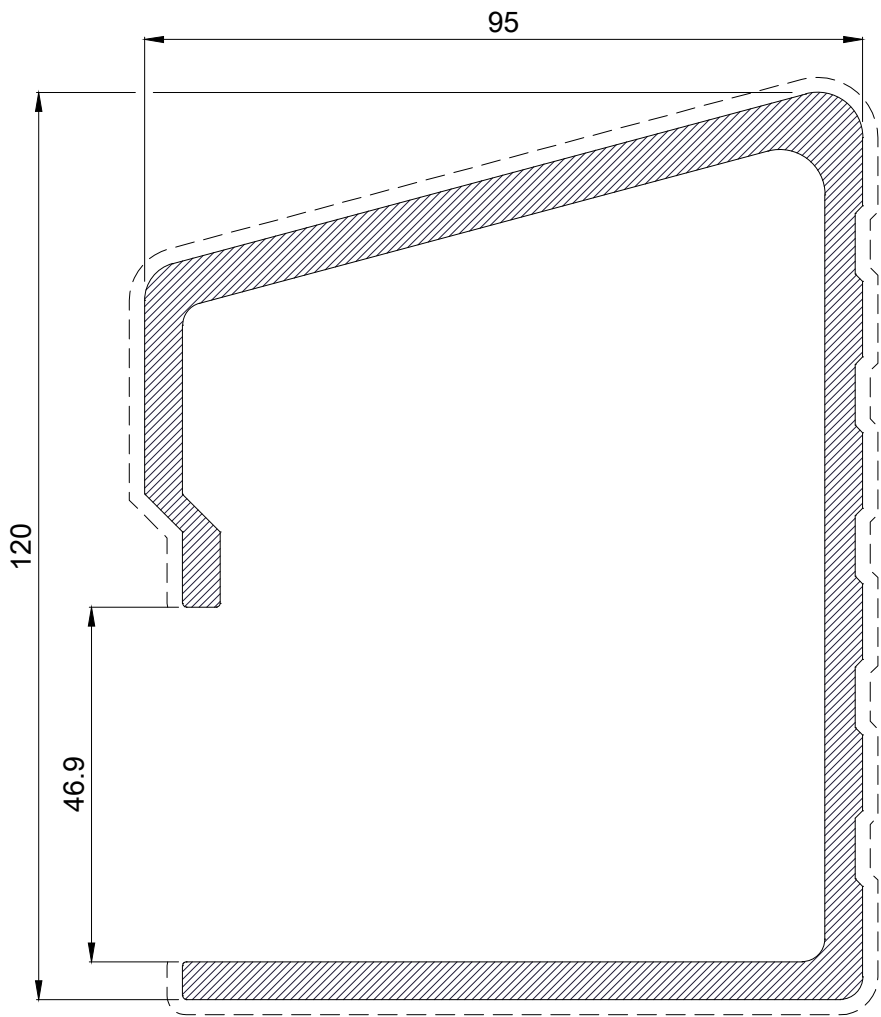


E: 1/1



- 4240 Profile

Characteristics:	Weight (kg/m): 5.454	Perimeter (mm): 711	Inertia Ix (cm4): 394,26	Inertia Iy (cm4): 442,80
Please consult minimum order and delivery time depending on the alloy required.				

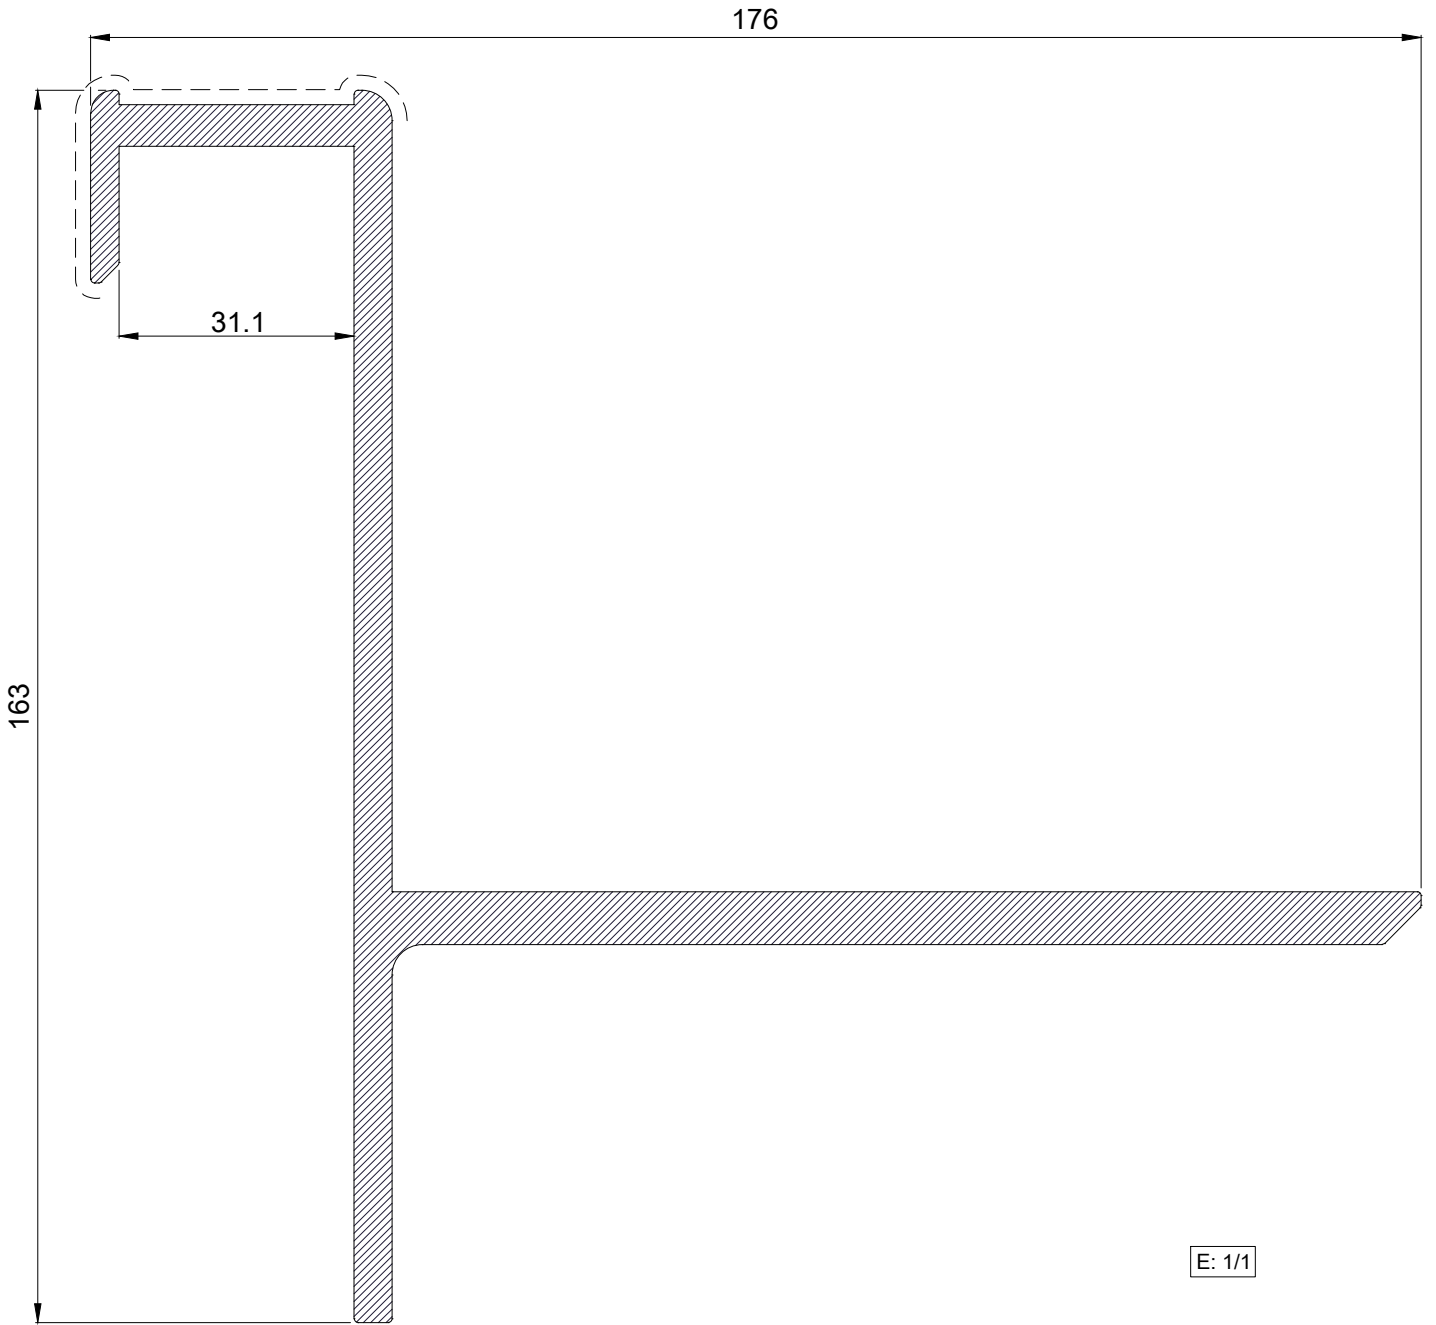


E: 1/1




- 3992 Profile

Characteristics:	Weight (kg/m): 3.380	Perimeter (mm): 645	Inertia Ix (cm4): 33,30	Inertia Iy (cm4): 216,03
Please consult minimum order and delivery time depending on the alloy required.				

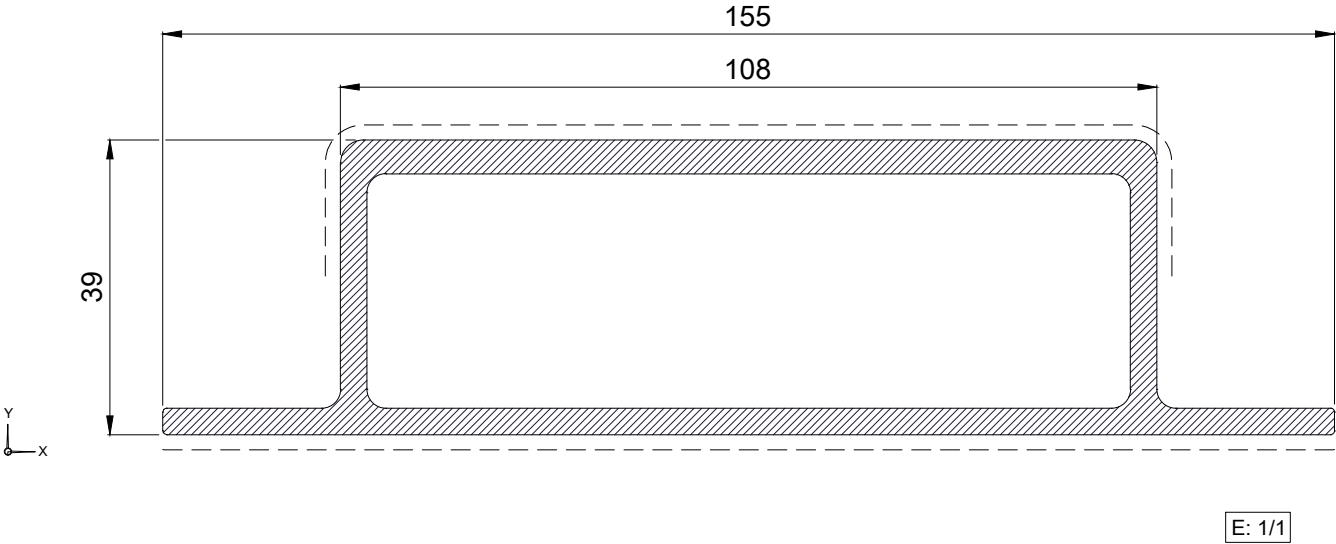


- 4071 Profile

Characteristics:	Weight (kg/m): 3.151	Perimeter (mm): 598	Inertia Ix (cm4): 30,78	Inertia Iy (cm4): 176,54
Please consult minimum order and delivery time depending on the alloy required.				

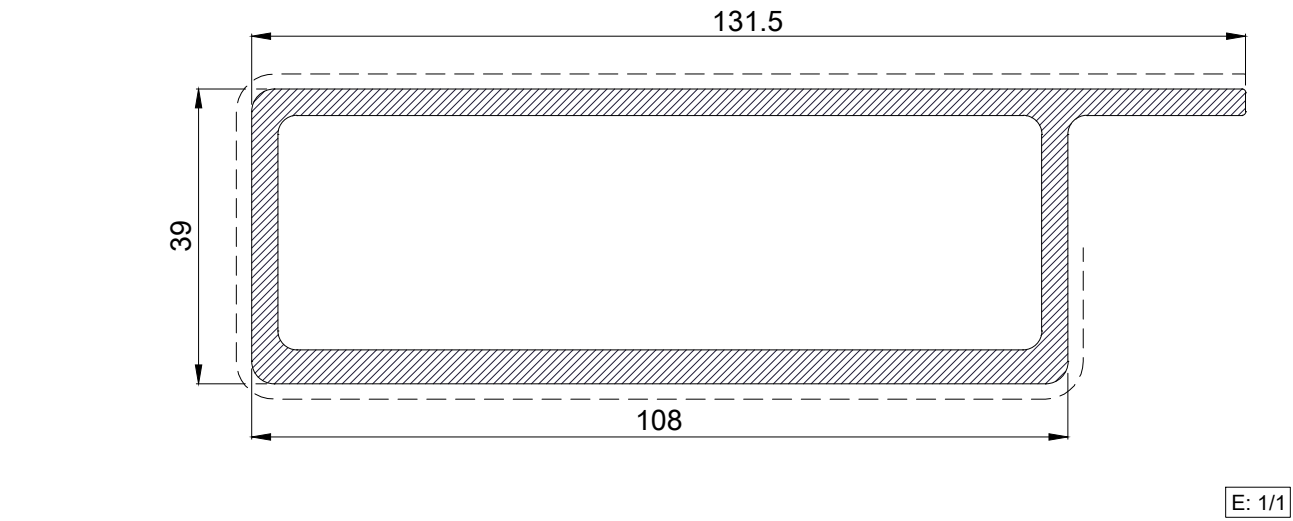

- 3994 U shaped profile

Characteristics:	Weight (kg/m): 2.444	Perimeter (mm): 587	Inertia Ix (cm4): 74,61	Inertia Iy (cm4): 222,83
Please consult minimum order and delivery time depending on the alloy required.				

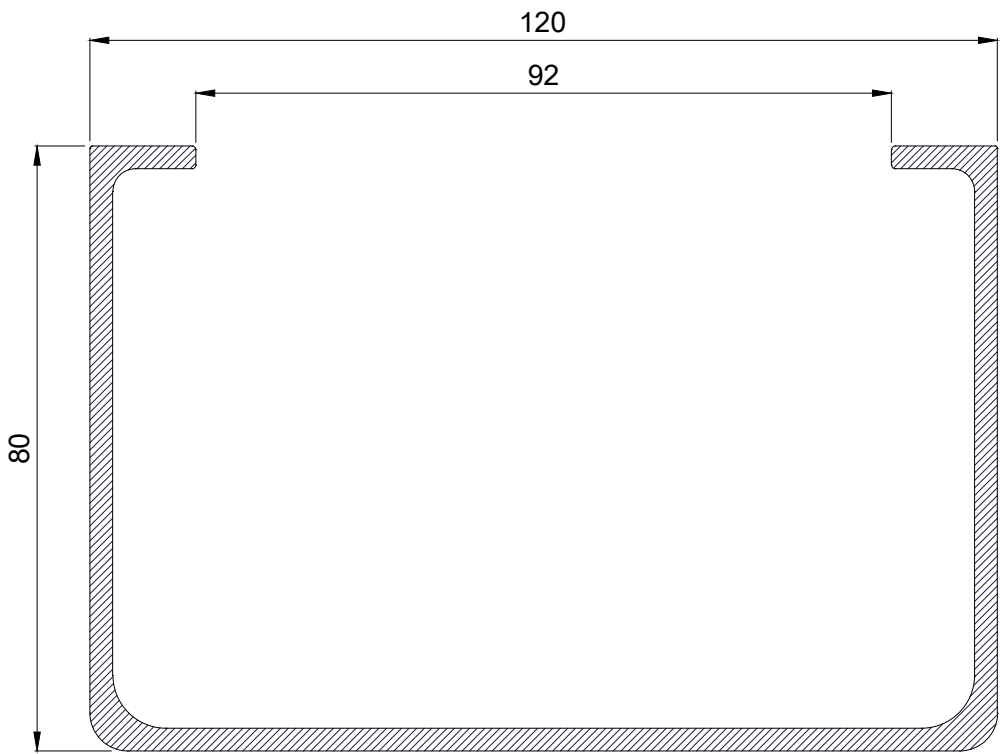


E: 1/1



- 3995 U shaped profile

Characteristics:	Weight (kg/m): 3.577	Perimeter (mm): 599	Inertia Ix (cm4): 105,72	Inertia Iy (cm4): 315,04
Please consult minimum order and delivery time depending on the alloy required.				

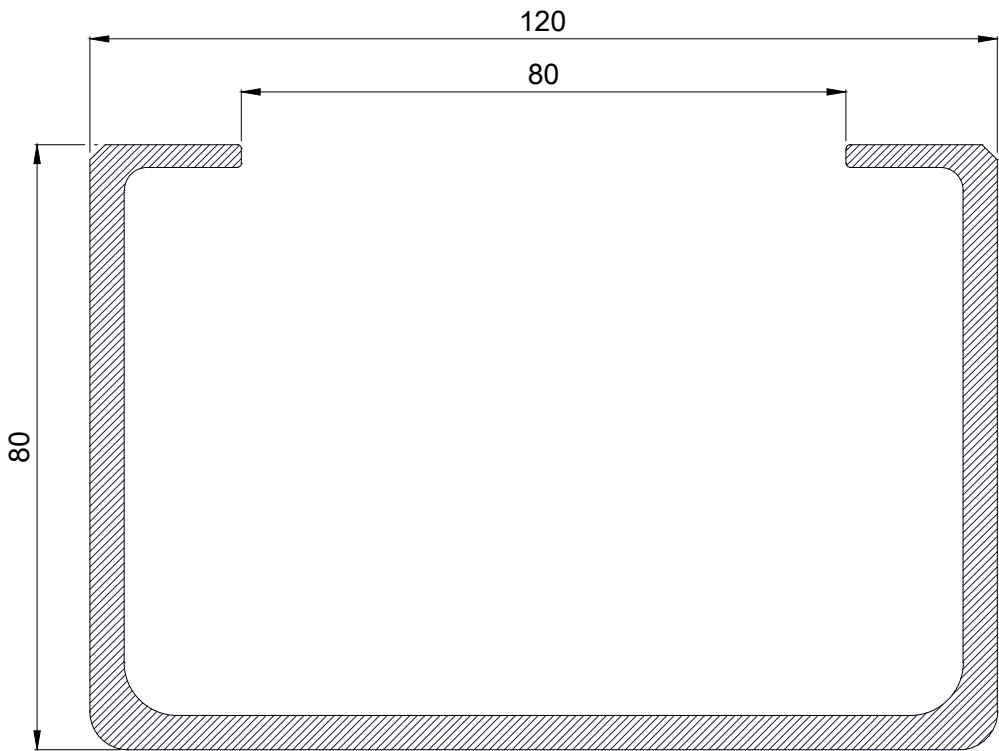


E: 1/1



- 4228 U shaped profil


Characteristics:	Weight (kg/m): 2.978	Perimeter (mm): 520	Inertia Ix (cm4): 77,12	Inertia Iy (cm4): 169,01
Please consult minimum order and delivery time depending on the alloy required.				

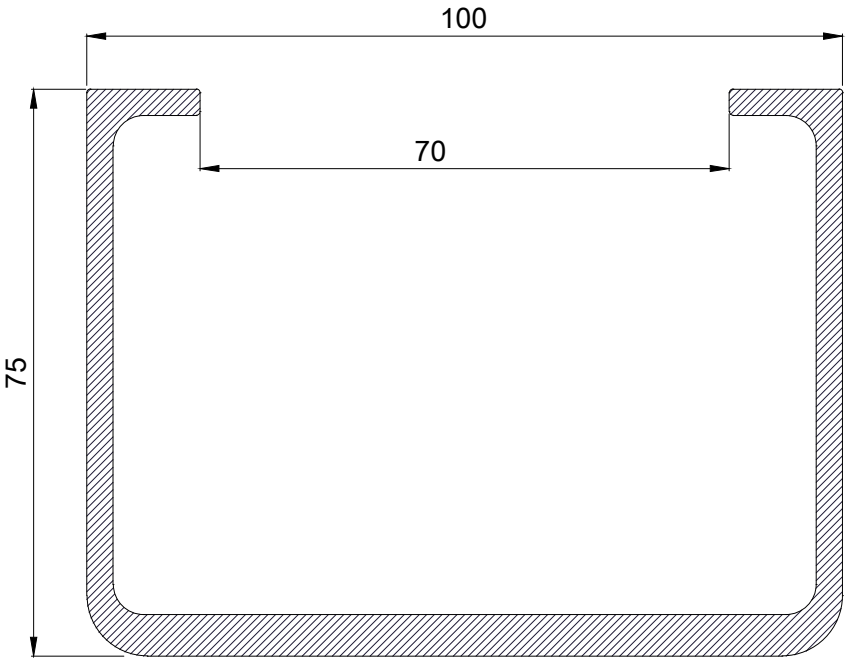

E: 1/1

- 3993 Omega

Characteristics:	Weight (kg/m): 1.960	Perimeter (mm): 400	Inertia Ix (cm4): 26,03	Inertia Iy (cm4): 75,77
Please consult minimum order and delivery time depending on the alloy required.				

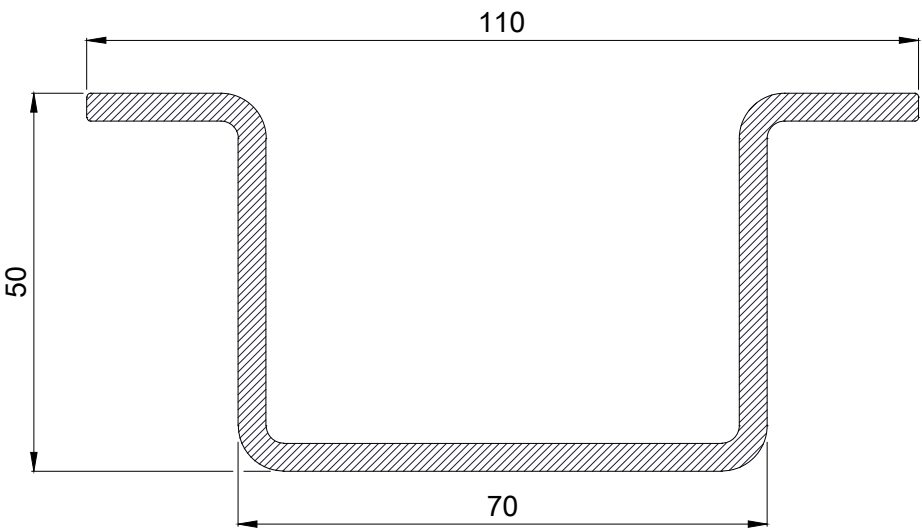


E: 1/1



- 4019 U shaped profil

Characteristics:	Weight (kg/m): 8.761	Perimeter (mm): 652	Inertia Ix (cm4): 249,30	Inertia Iy (cm4): 1261,63
Please consult minimum order and delivery time depending on the alloy required.				

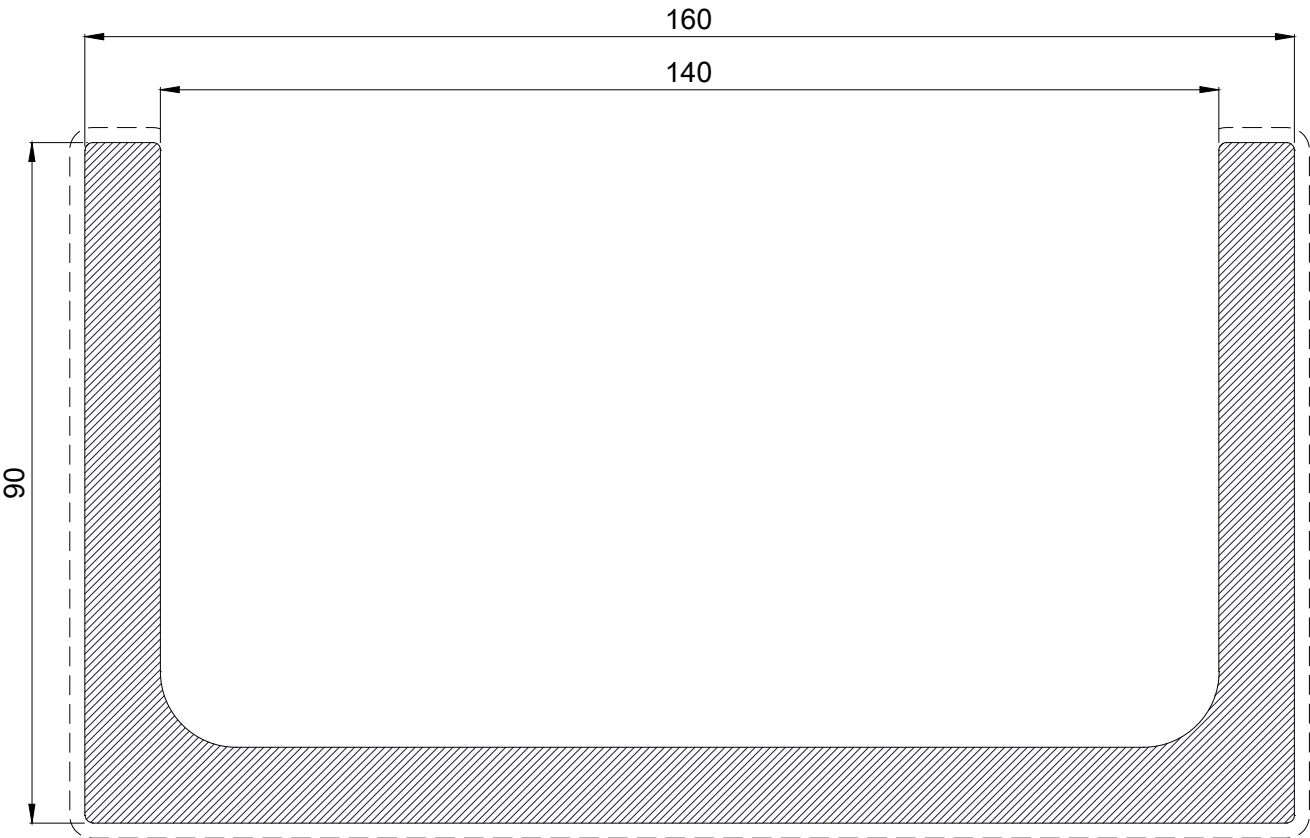


E: 1/1



- 4168 U shaped profil

Characteristics:	Weight (kg/m): 7.028	Perimeter (mm): 542	Inertia Ix (cm4): 77,54	Inertia Iy (cm4): 904,60
Please consult minimum order and delivery time depending on the alloy required.				

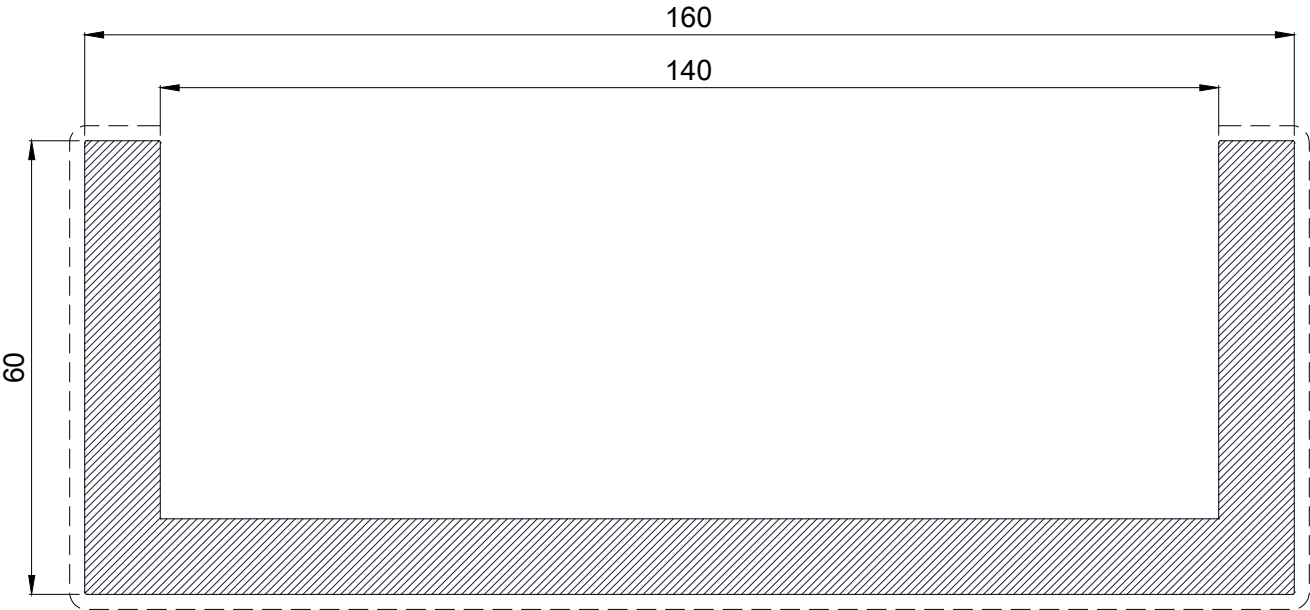


E: 1/1



- 4168 U shaped profil

Characteristics:	Weight (kg/m): 7.274	Perimeter (mm): 605	Inertia Ix (cm4): 122,89	Inertia Iy (cm4): 987,90
Please consult minimum order and delivery time depending on the alloy required.				

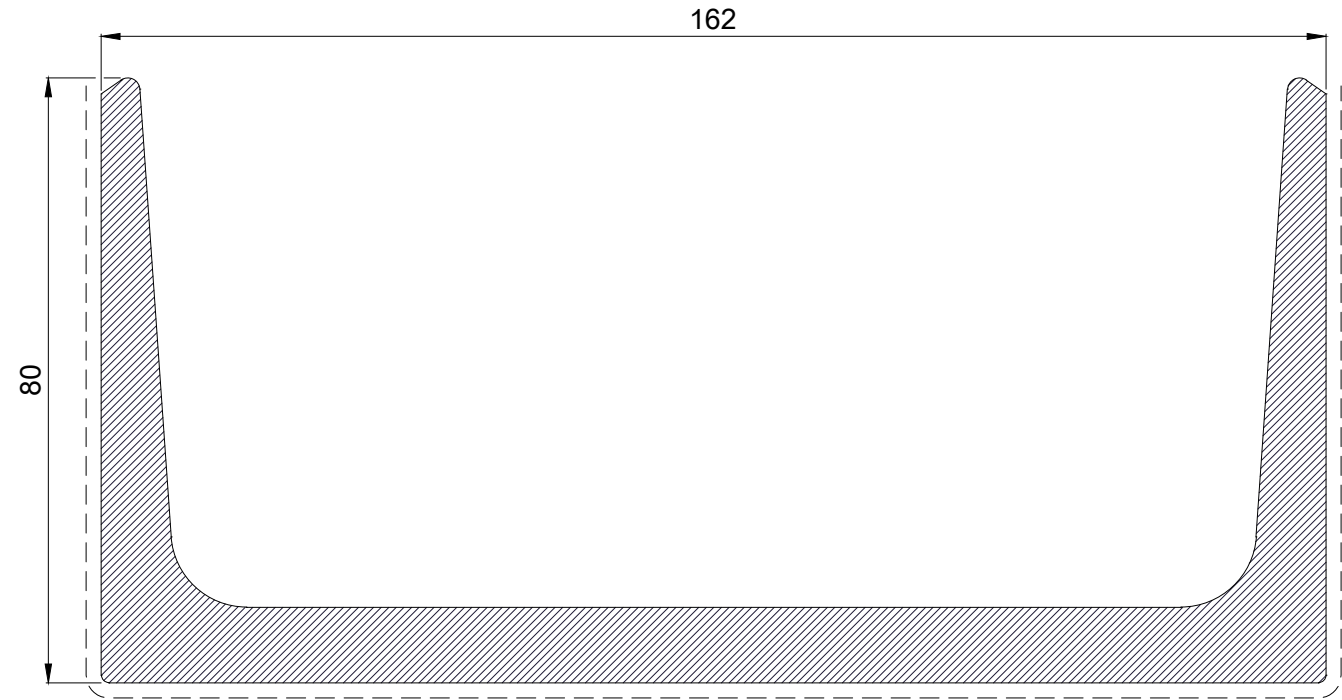


E: 1/1



- 14281 U shaped profil

Characteristics:	Weight (kg/m): 4.789	Perimeter (mm): 545	Inertia Ix (cm4): 201,69	Inertia Iy (cm4): 128,74
Please consult minimum order and delivery time depending on the alloy required.				

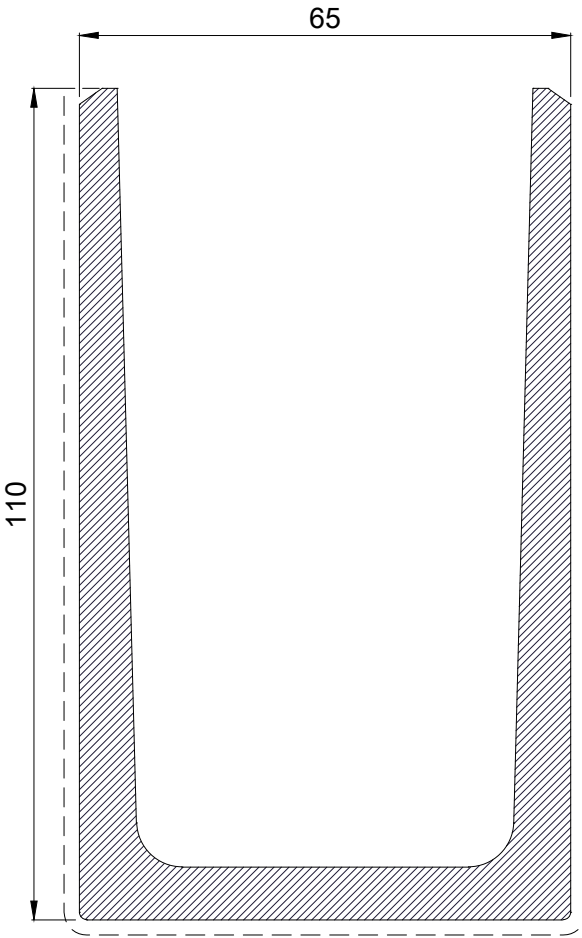


E: 1/1



- 14280 U shaped profil

Characteristics:	Weight (kg/m): 3.259	Perimeter (mm): 410	Inertia Ix (cm4): 64,70	Inertia Iy (cm4): 84,73
Please consult minimum order and delivery time depending on the alloy required.				

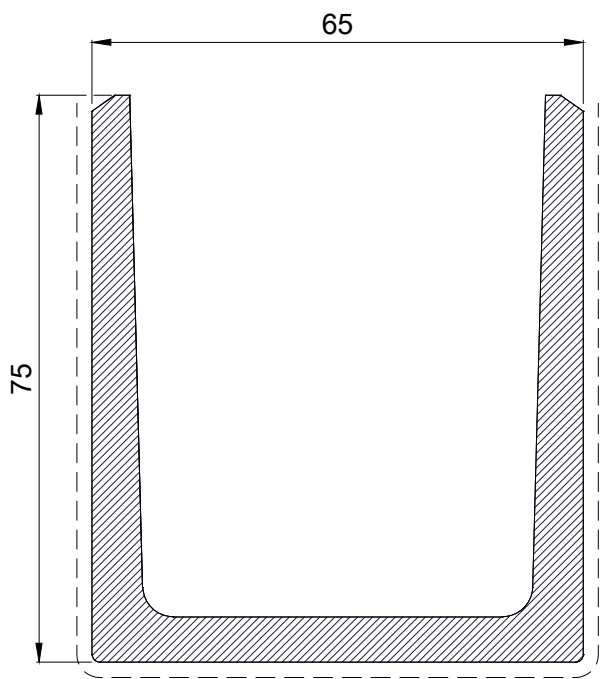


E: 1/1



- 4592 Profile

Characteristics:	Weight (kg/m): 5.362	Perimeter (mm): 565	Inertia Ix (cm4): 786,55	Inertia Iy (cm4): 131,82
Please consult minimum order and delivery time depending on the alloy required.				

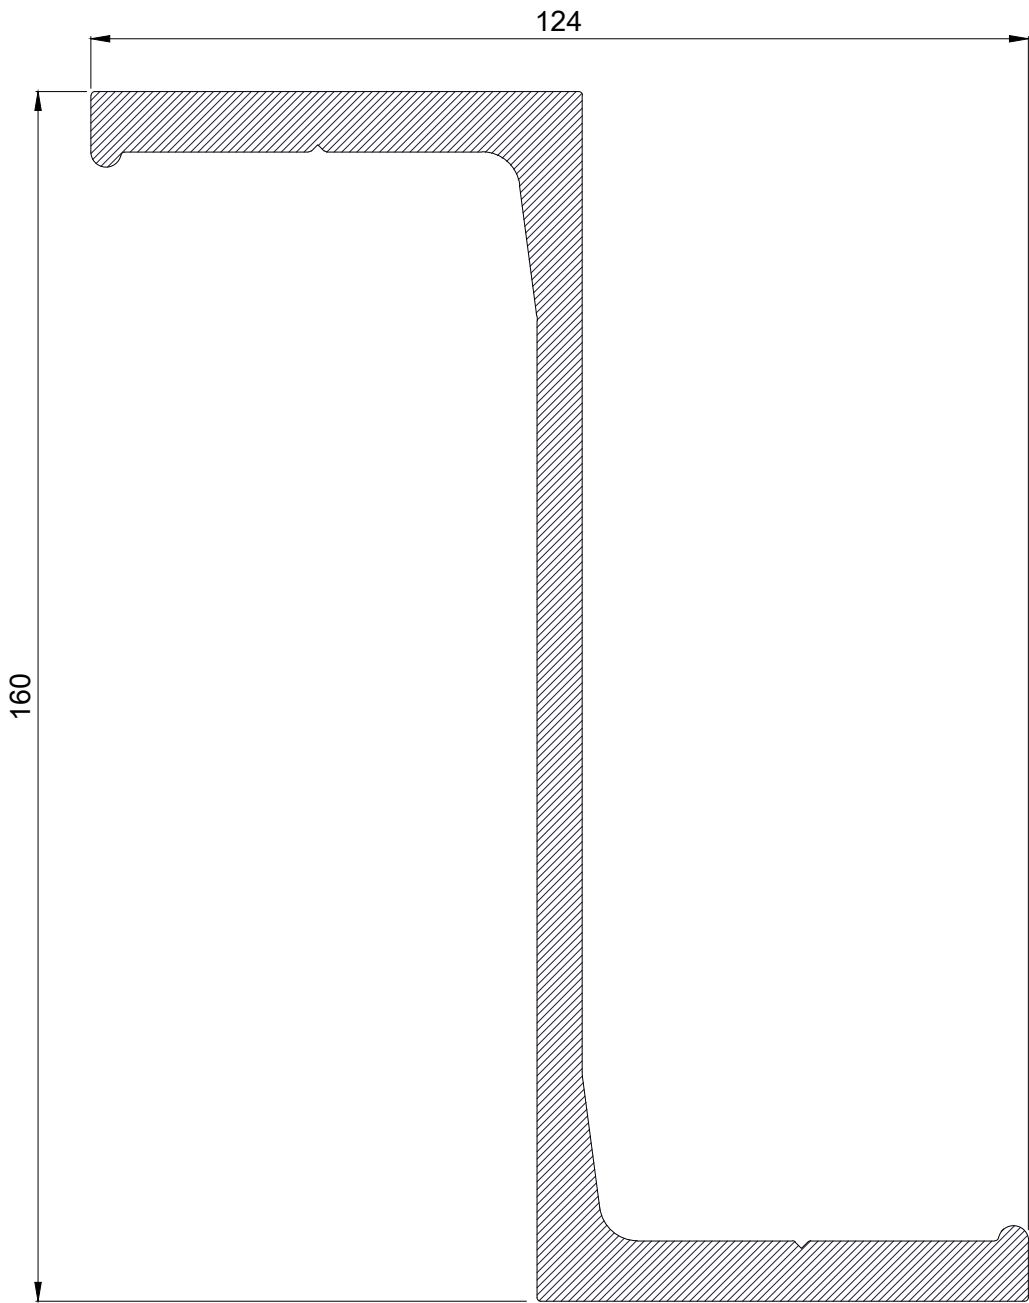


E: 1/1



- 4593 Profile

Characteristics:	Weight (kg/m): 5.038	Perimeter (mm): 525	Inertia Ix (cm4): 574,89	Inertia Iy (cm4): 131,79
Please consult minimum order and delivery time depending on the alloy required.				

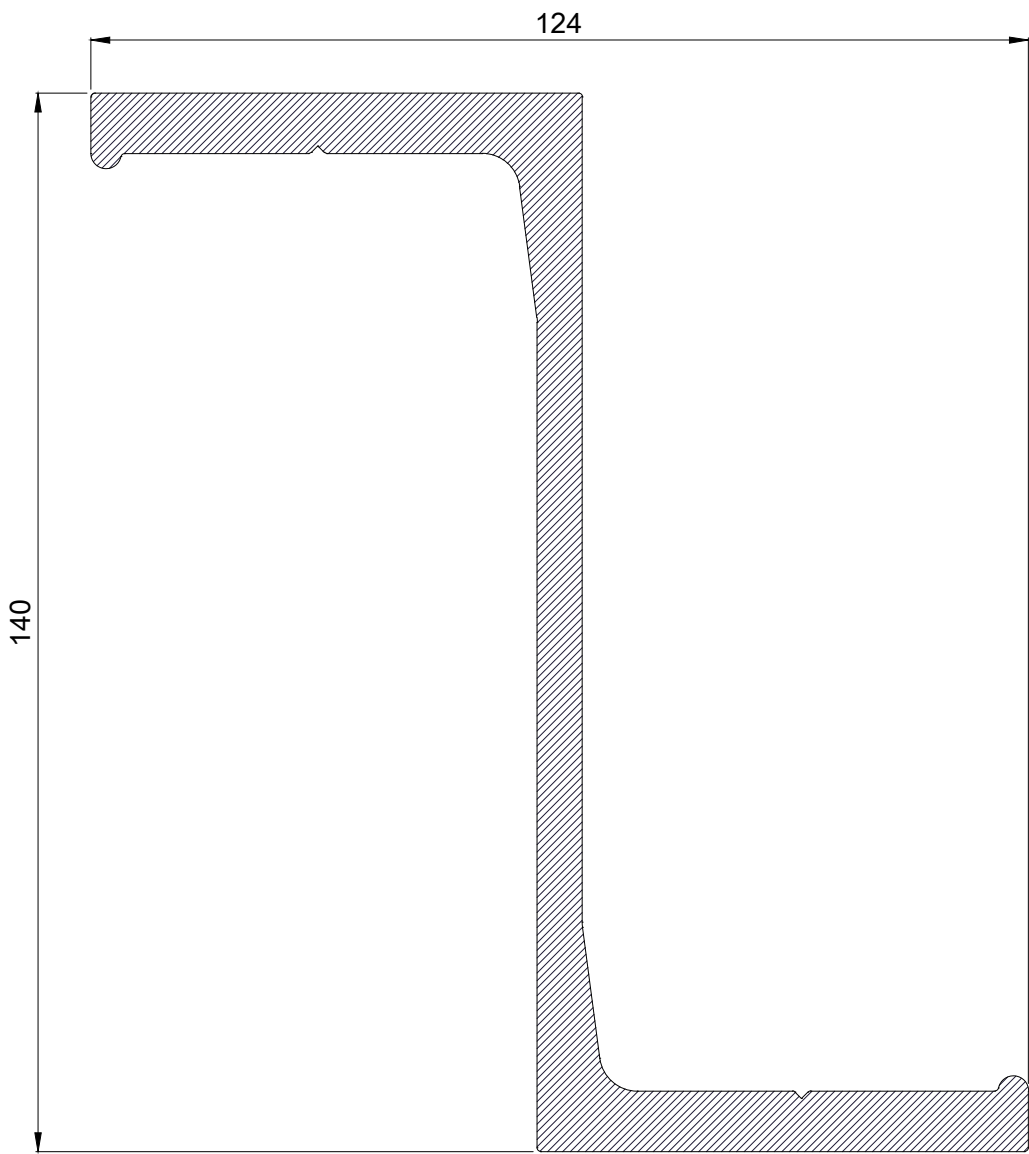


E: 1/1



- 4594 Profile

Characteristics:	Weight (kg/m): 3.696	Perimeter (mm): 445	Inertia Ix (cm4): 230,19	Inertia Iy (cm4): 115,69
Please consult minimum order and delivery time depending on the alloy required.				

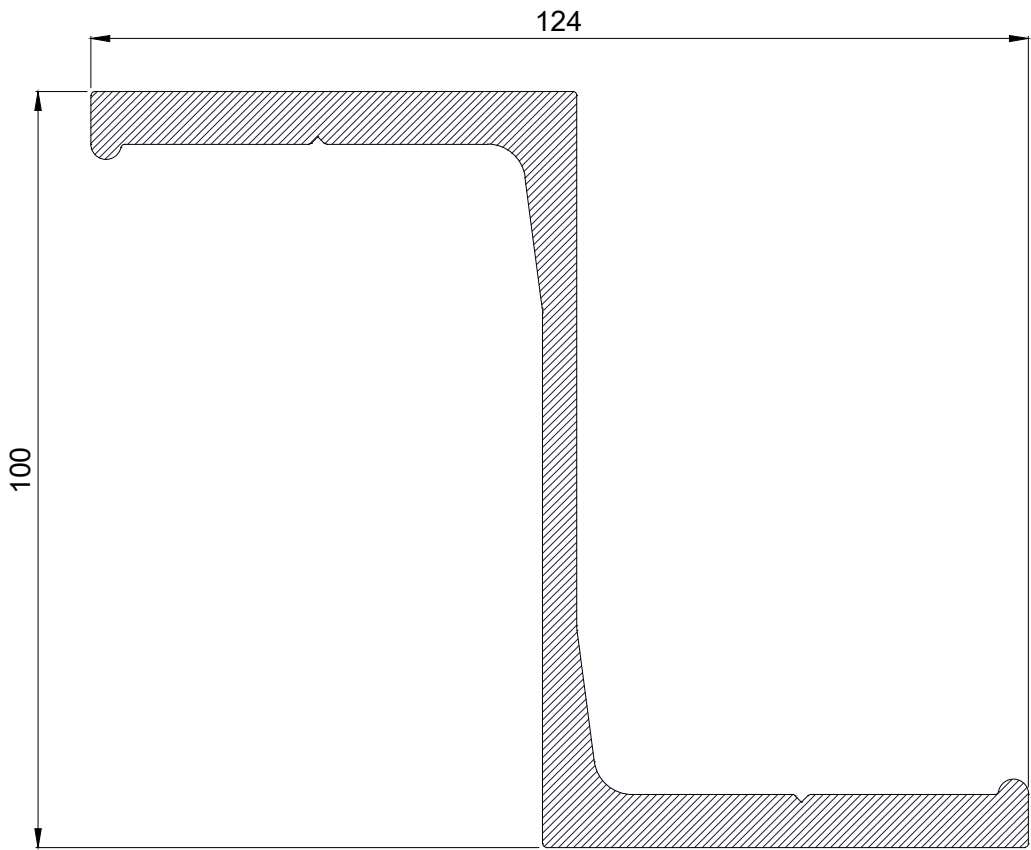


E: 1/1



- 4575 Profile

Characteristics:	Weight (kg/m): 19.033	Perimeter (mm): 1154	Inertia Ix (cm4): 7979,14	Inertia Iy (cm4): 1271,05
Please consult minimum order and delivery time depending on the alloy required.				

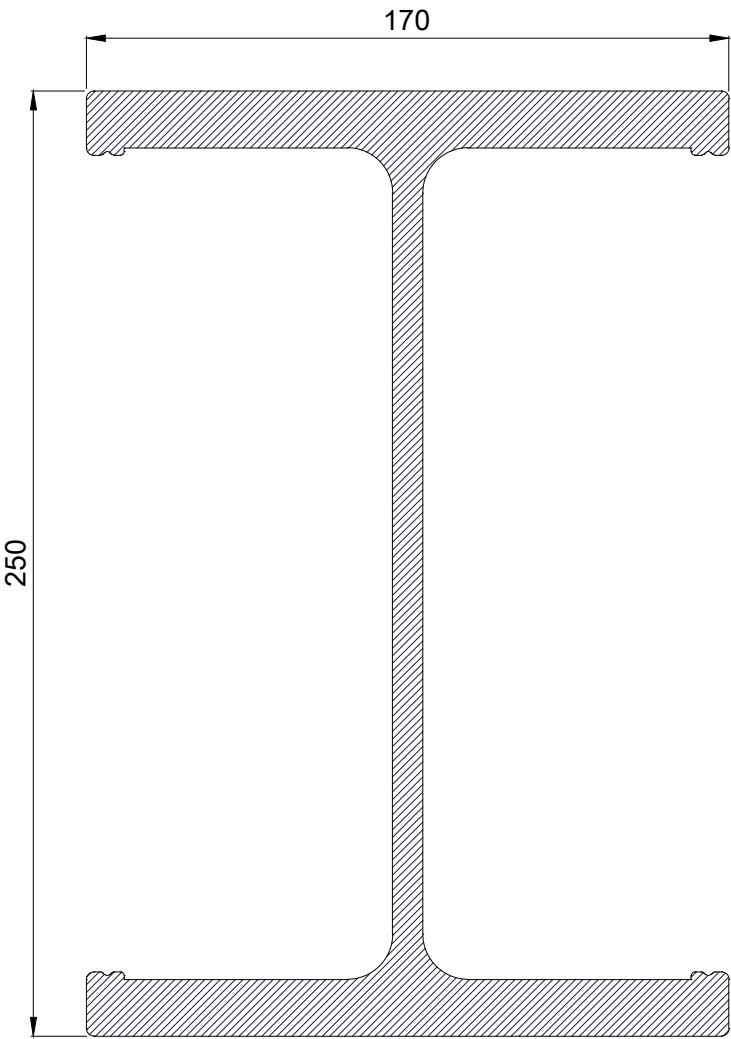


E: 1/2



- 13765 Profile

Characteristics:	Weight (kg/m): 10.484	Perimeter (mm): 791	Inertia Ix (cm4): 923,58	Inertia Iy (cm4): 469,36
Please consult minimum order and delivery time depending on the alloy required.				

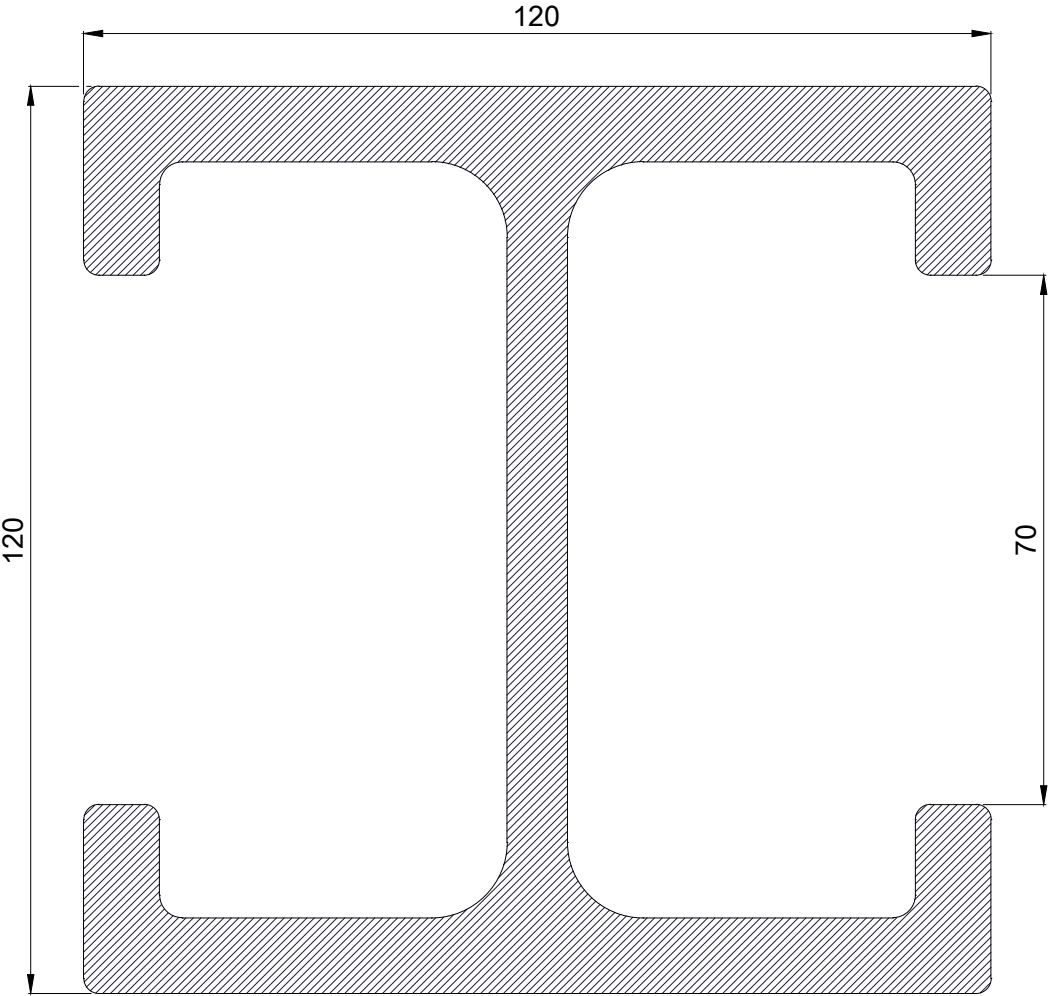


E: 1/1



- 3922 Profile

Characteristics:	Weight (kg/m): 3.918	Perimeter (mm): 360	Inertia Ix (cm4): 136,69	Inertia Iy (cm4): 24,24
Please consult minimum order and delivery time depending on the alloy required.				

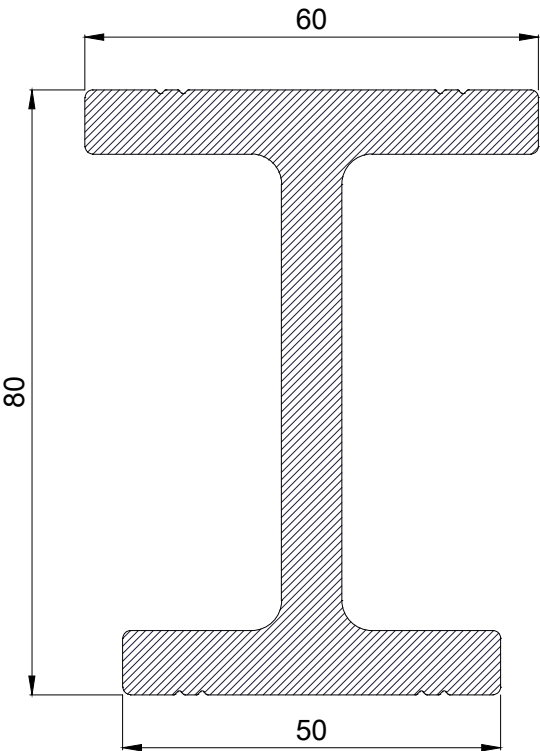


E: 1/1




- 4016 Profile

Characteristics:	Weight (kg/m): 5.154	Perimeter (mm): 748	Inertia Ix (cm4): 57,41	Inertia Iy (cm4): 370,92
Please consult minimum order and delivery time depending on the alloy required.				

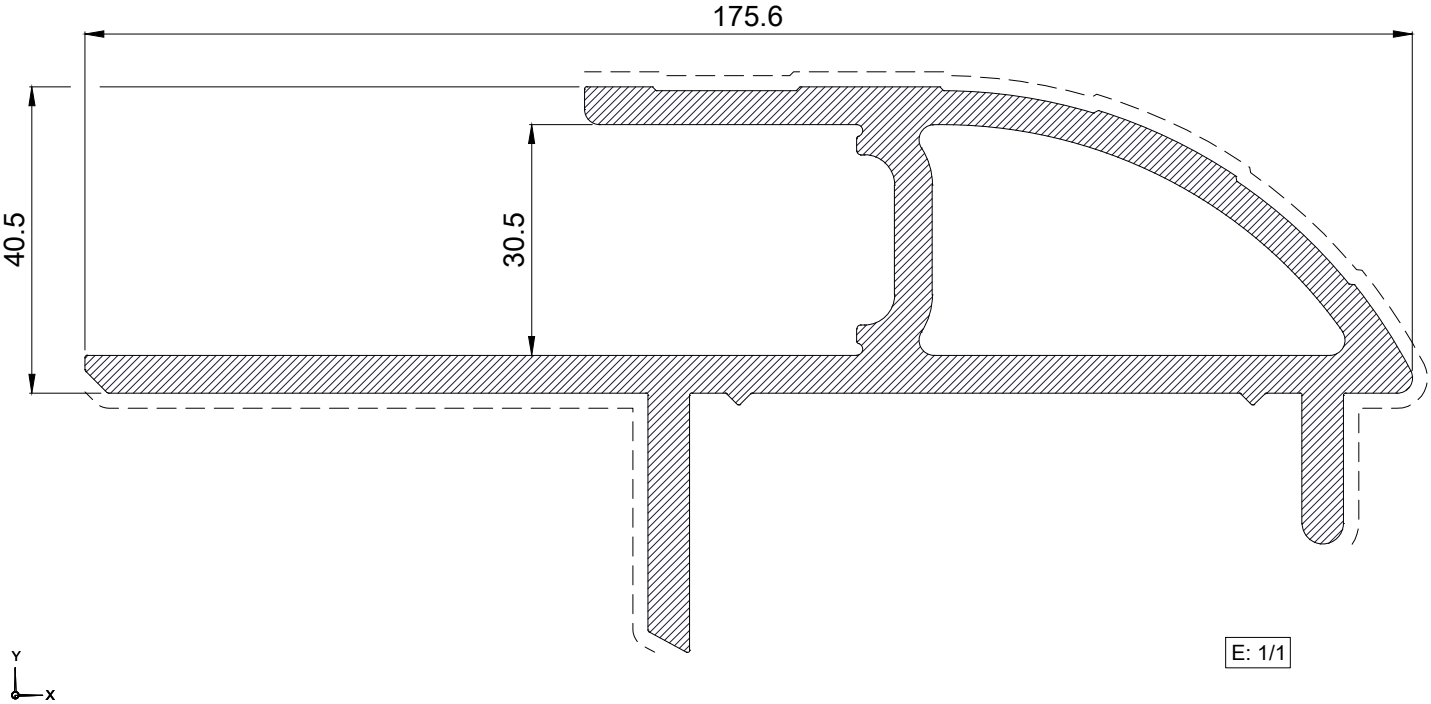


- 4041 Perfil

Características:	Weight (kg/m): 4.855	Perimeter (mm): 666	Inertia Ix (cm4): 36,78	Inertia Iy (cm4): 285,18
Please consult minimum order and delivery time depending on the alloy required.				

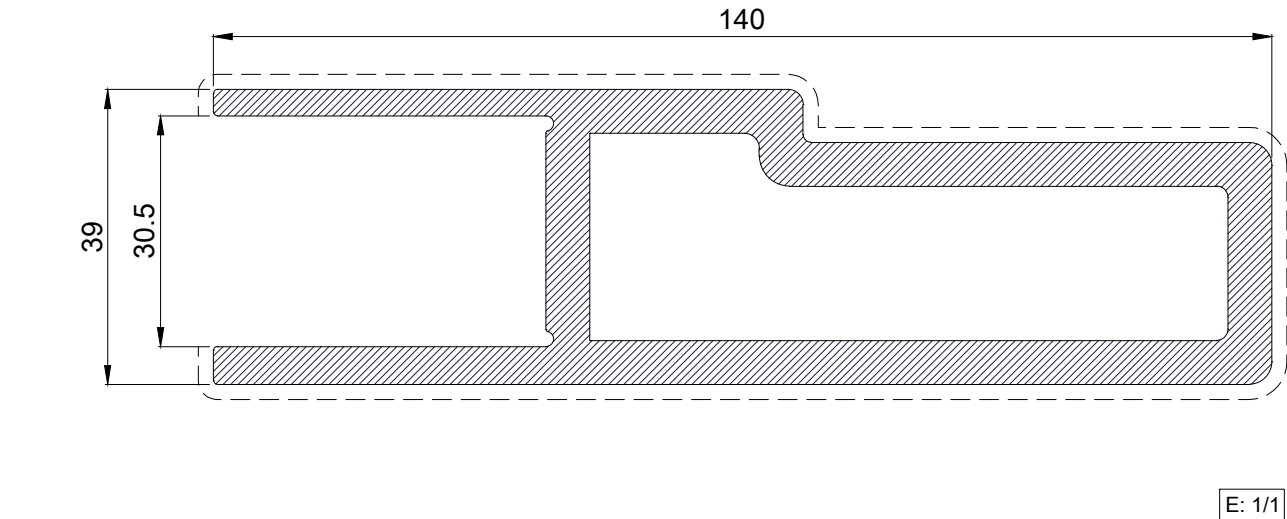

- 4017 Profile

Characteristics:	Weight (kg/m): 6.845	Perimeter (mm): 867	Inertia Ix (cm4): 449,57	Inertia Iy (cm4): 185,87
Please consult minimum order and delivery time depending on the alloy required.				

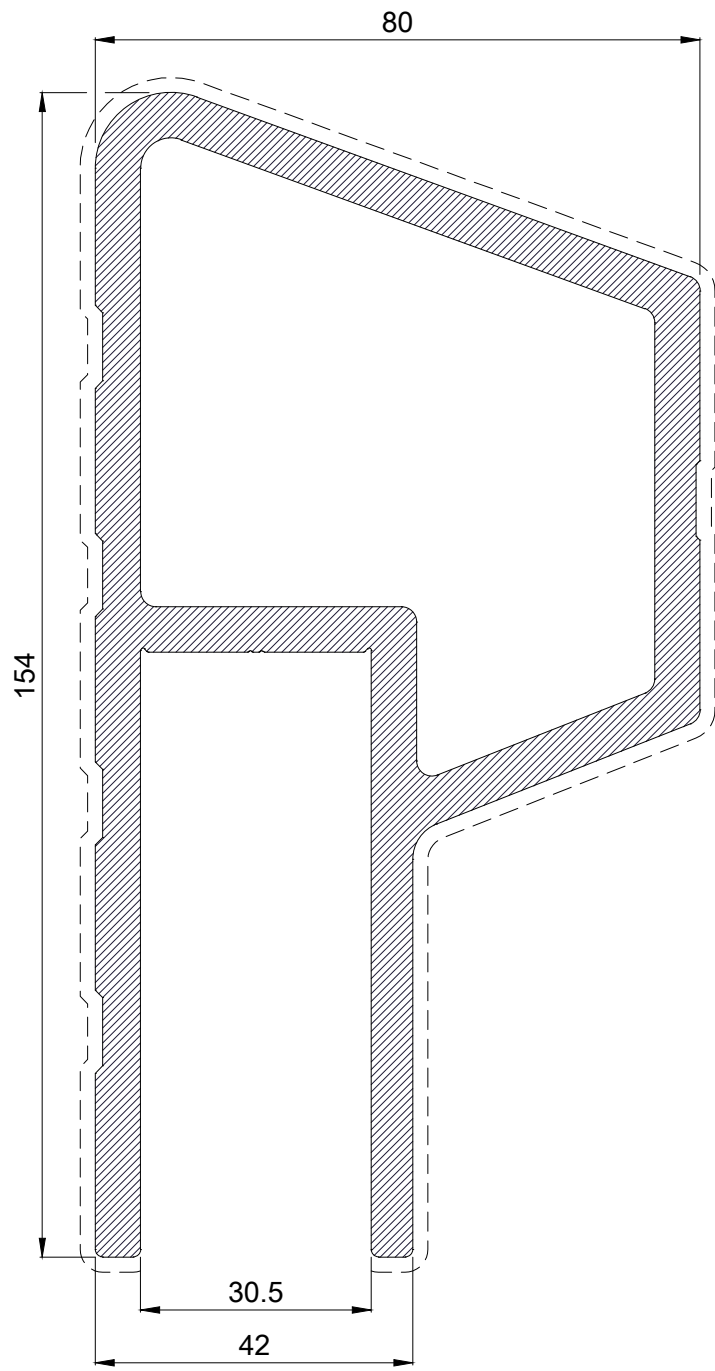


E: 1/1



- 4046 Profile

Characteristics:	Weight (kg/m): 2.835	Perimeter (mm): 676	Inertia Ix (cm4): 10,47	Inertia Iy (cm4): 213,06
Please consult minimum order and delivery time depending on the alloy required.				

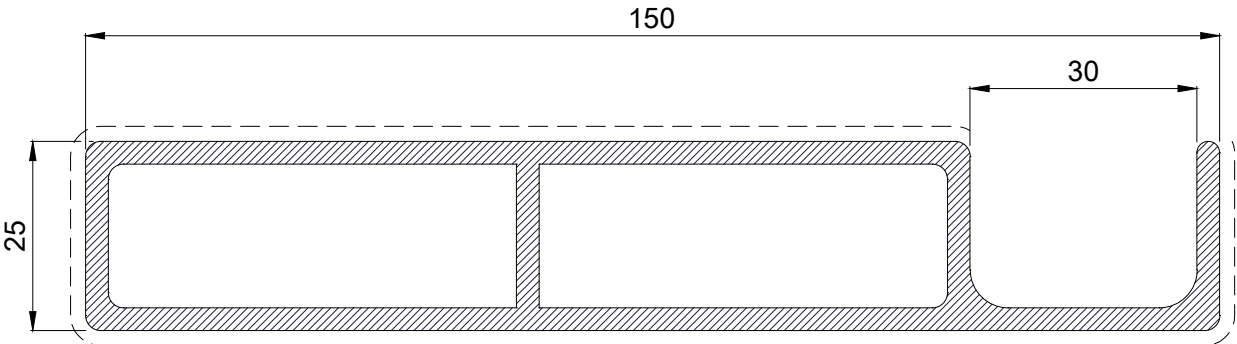


E: 1/1



- 14084 Profile

Characteristics:	Weight (kg/m): 2.970	Perimeter (mm): 439	Inertia Ix (cm4): 38,94	Inertia Iy (cm4): 66,13
Please consult minimum order and delivery time depending on the alloy required.				

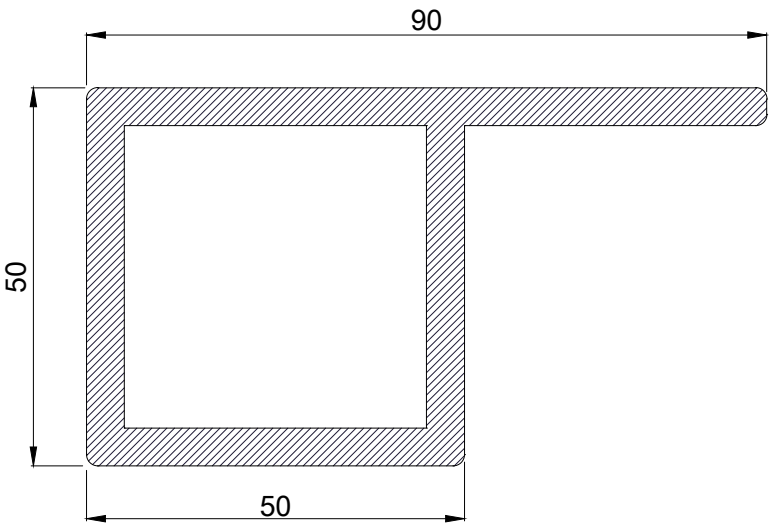


E: 1/1



- 4392 Profile

Characteristics:	Weight (kg/m): 3.386	Perimeter (mm): 493	Inertia Ix (cm4): 8,24	Inertia Iy (cm4): 208,64
Please consult minimum order and delivery time depending on the alloy required.				

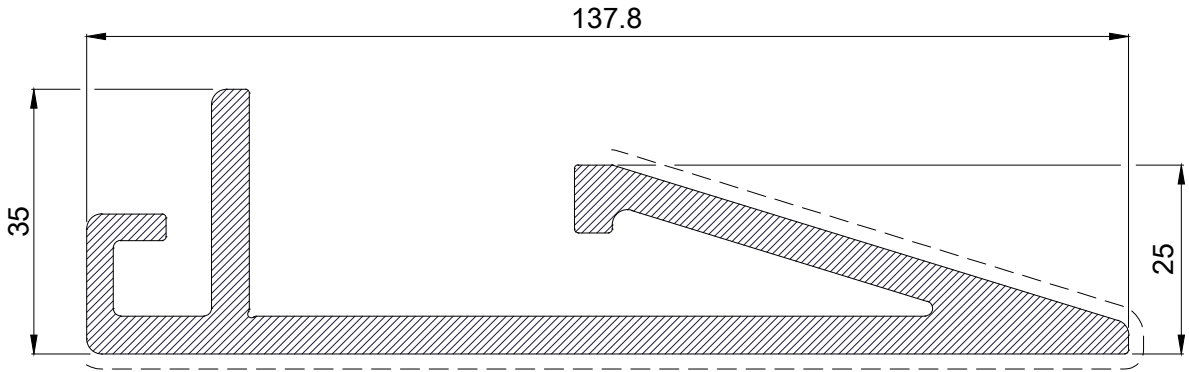


E: 1/1



- 4422 Profile

Characteristics:	Weight (kg/m): 6.440	Perimeter (mm): 631	Inertia Ix (cm4): 61,27	Inertia Iy (cm4): 429,49
Please consult minimum order and delivery time depending on the alloy required.				

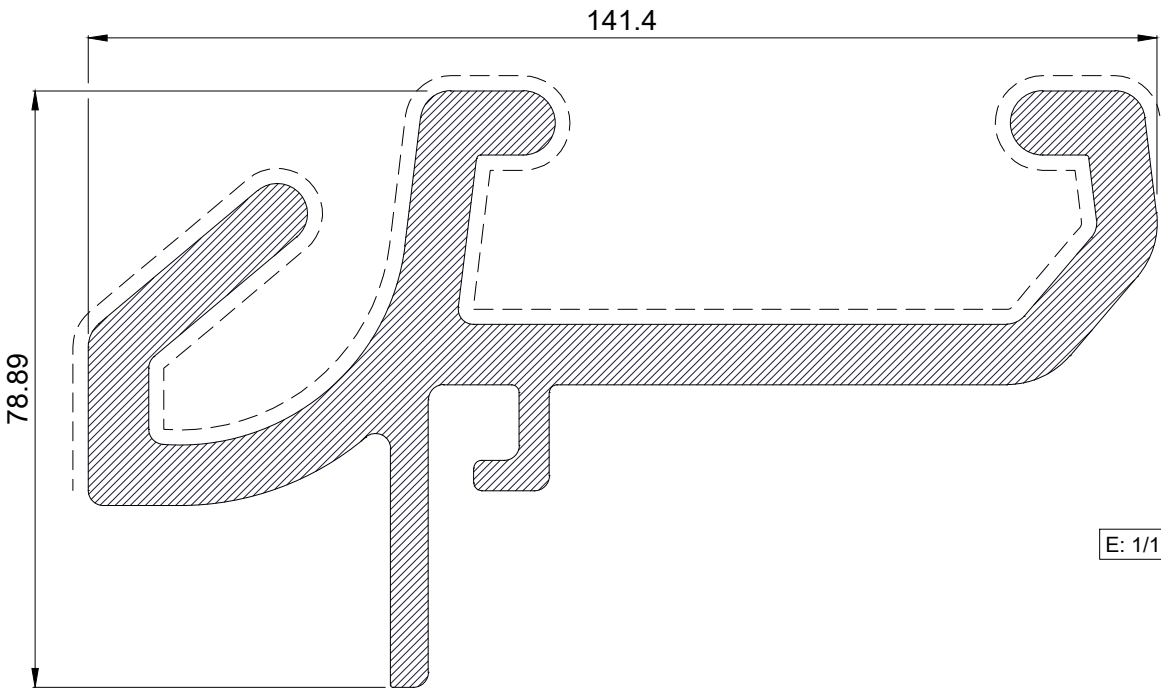


E: 1/1



- 4015 Profile

Characteristics:	Weight (kg/m): 5.651	Perimeter (mm): 755	Inertia Ix (cm4): 79,32	Inertia Iy (cm4): 426,94
Please consult minimum order and delivery time depending on the alloy required.				

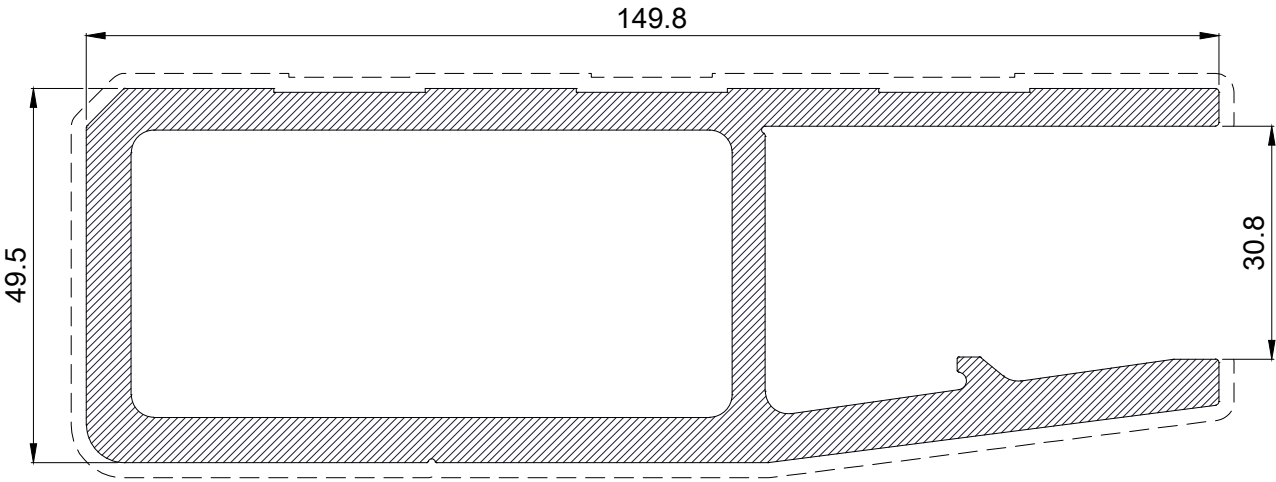


E: 1/1




- 14396 Profile

Characteristics:	Weight (kg/m): 1.679	Perimeter (mm): 318	Inertia Ix (cm4): 10,39	Inertia Iy (cm4): 32,95
Please consult minimum order and delivery time depending on the alloy required.				

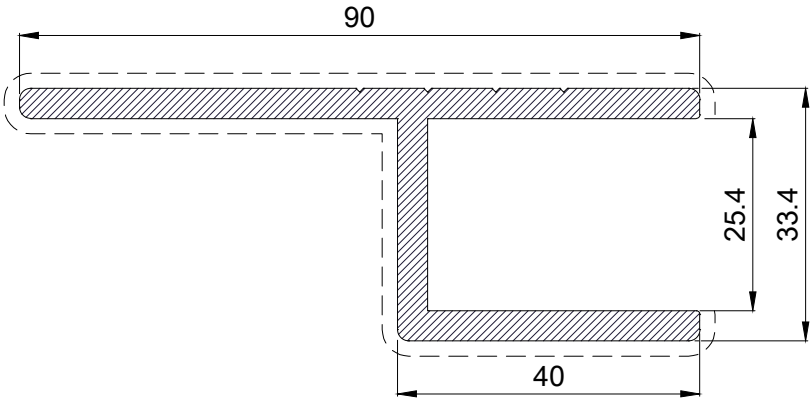

14395 Profile

Characteristics:	Weight (kg/m): 1.139	Perimeter (mm): 218	Inertia Ix (cm4): 6,69	Inertia Iy (cm4): 7,45
Please consult minimum order and delivery time depending on the alloy required.				

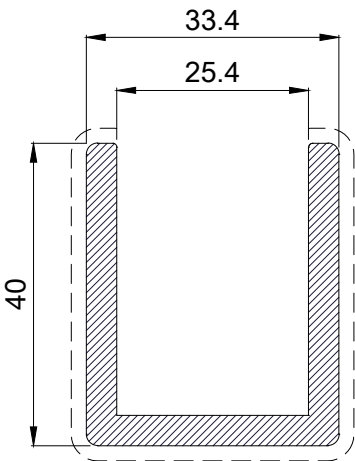


E: 1/1



- 4157 Profile

Characteristics:	Weight (kg/m): 0.769	Perimeter (mm): 191	Inertia Ix (cm4): 1,31	Inertia Iy (cm4): 4,37
Please consult minimum order and delivery time depending on the alloy required.				

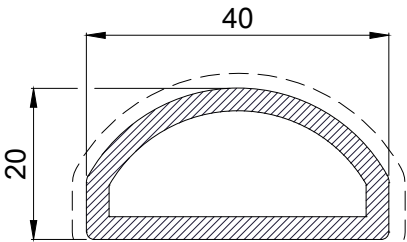


E: 1/1



- 4007 Profile

Characteristics:	Weight (kg/m): 0.751	Perimeter (mm): 186	Inertia Ix (cm4): 1,26	Inertia Iy (cm4): 3,97
Please consult minimum order and delivery time depending on the alloy required.				

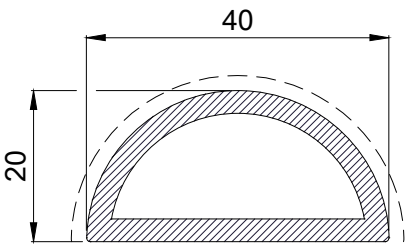


E: 1/1



- 4599 Cornerback

Characteristics:	Weight (kg/m): 4.744	Perimeter (mm): 769	Inertia Ix (cm4): 375,44	Inertia Iy (cm4): 311,23
Please consult minimum order and delivery time depending on the alloy required.				

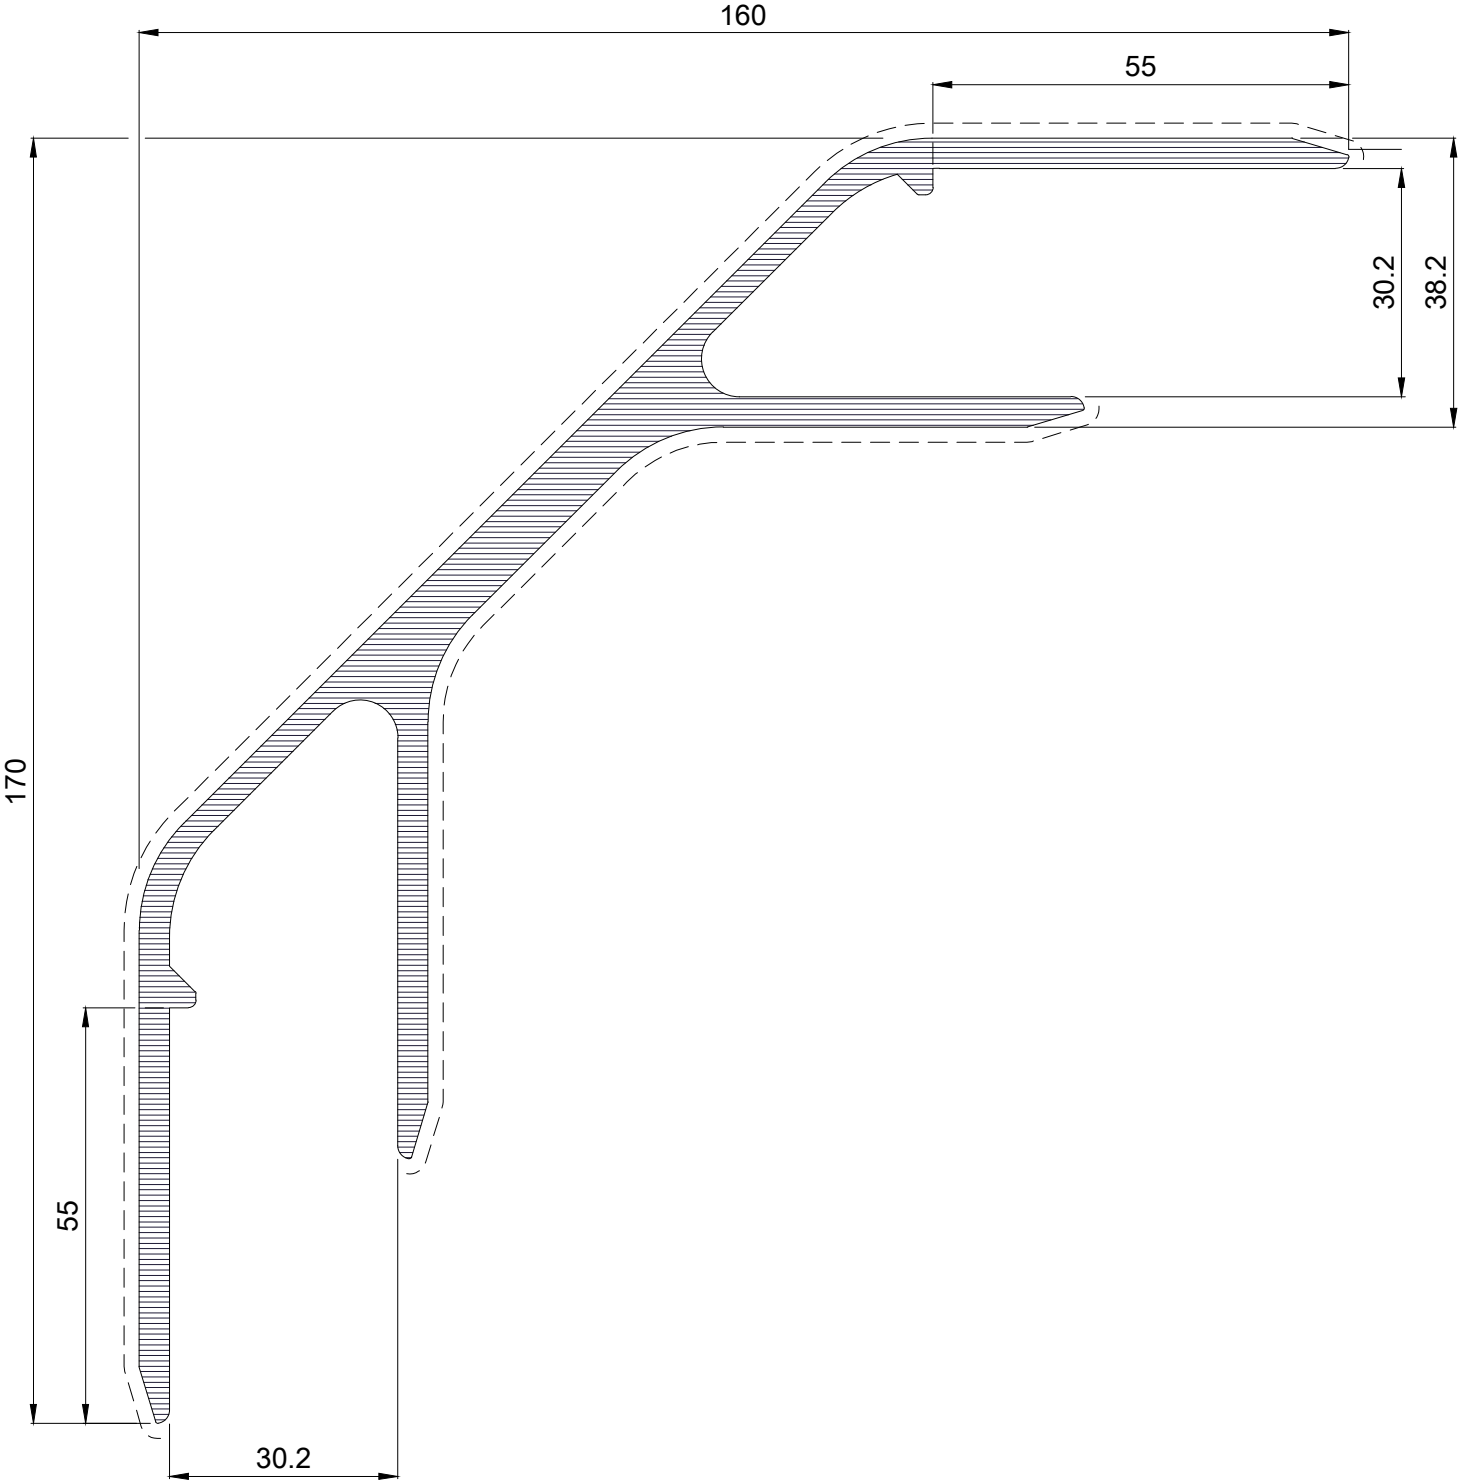


E: 1/1



- 4050 Cornerback


Characteristics:	Weight (kg/m): 3.162	Perimeter (mm): 553	Inertia Ix (cm4): 61,86	Inertia Iy (cm4): 57,67
Please consult minimum order and delivery time depending on the alloy required.				

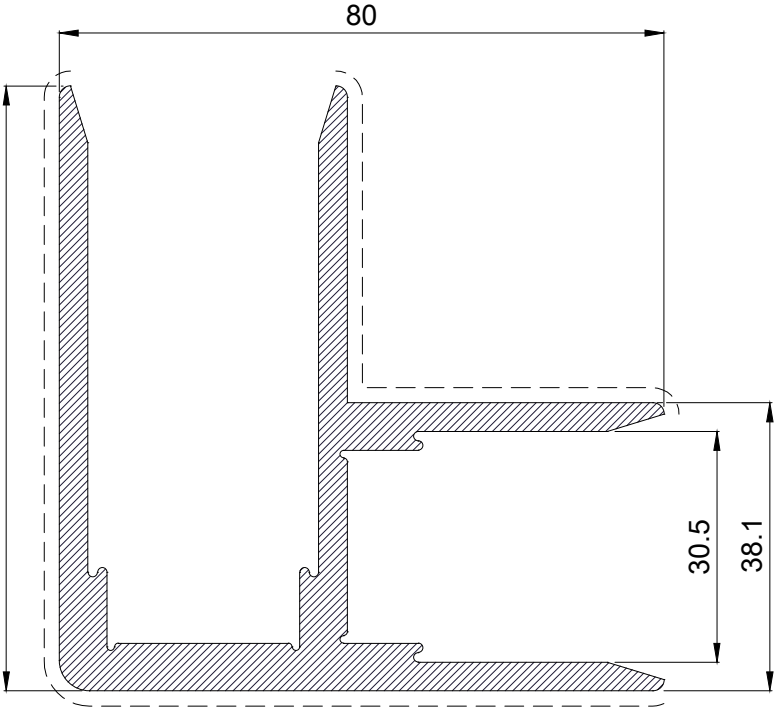

E: 1/1

- 3681 Esquinero

Characteristics:	Weight (kg/m): 1.239	Perimeter (mm): 461	Inertia Ix (cm4): 13,51	Inertia Iy (cm4): 13,51
Please consult minimum order and delivery time depending on the alloy required.				

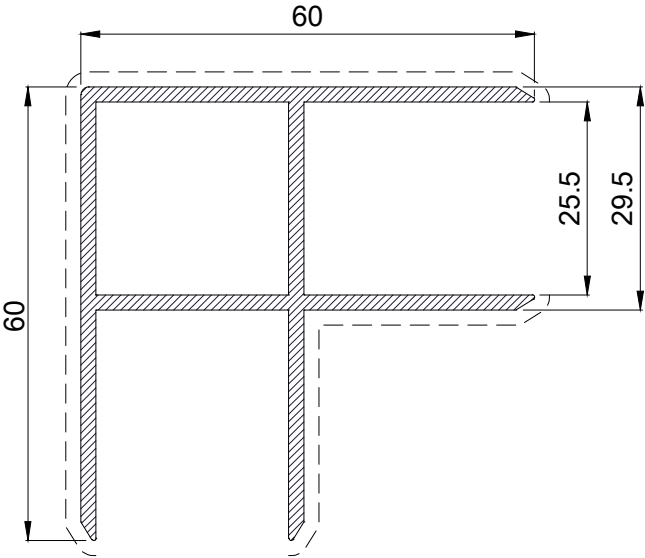


E: 1/1




- 4380 Profile

Characteristics:	Weight (kg/m): 3.248	Perimeter (mm): 618	Inertia Ix (cm4): 764,68	Inertia Iy (cm4): 18,88
Please consult minimum order and delivery time depending on the alloy required.				

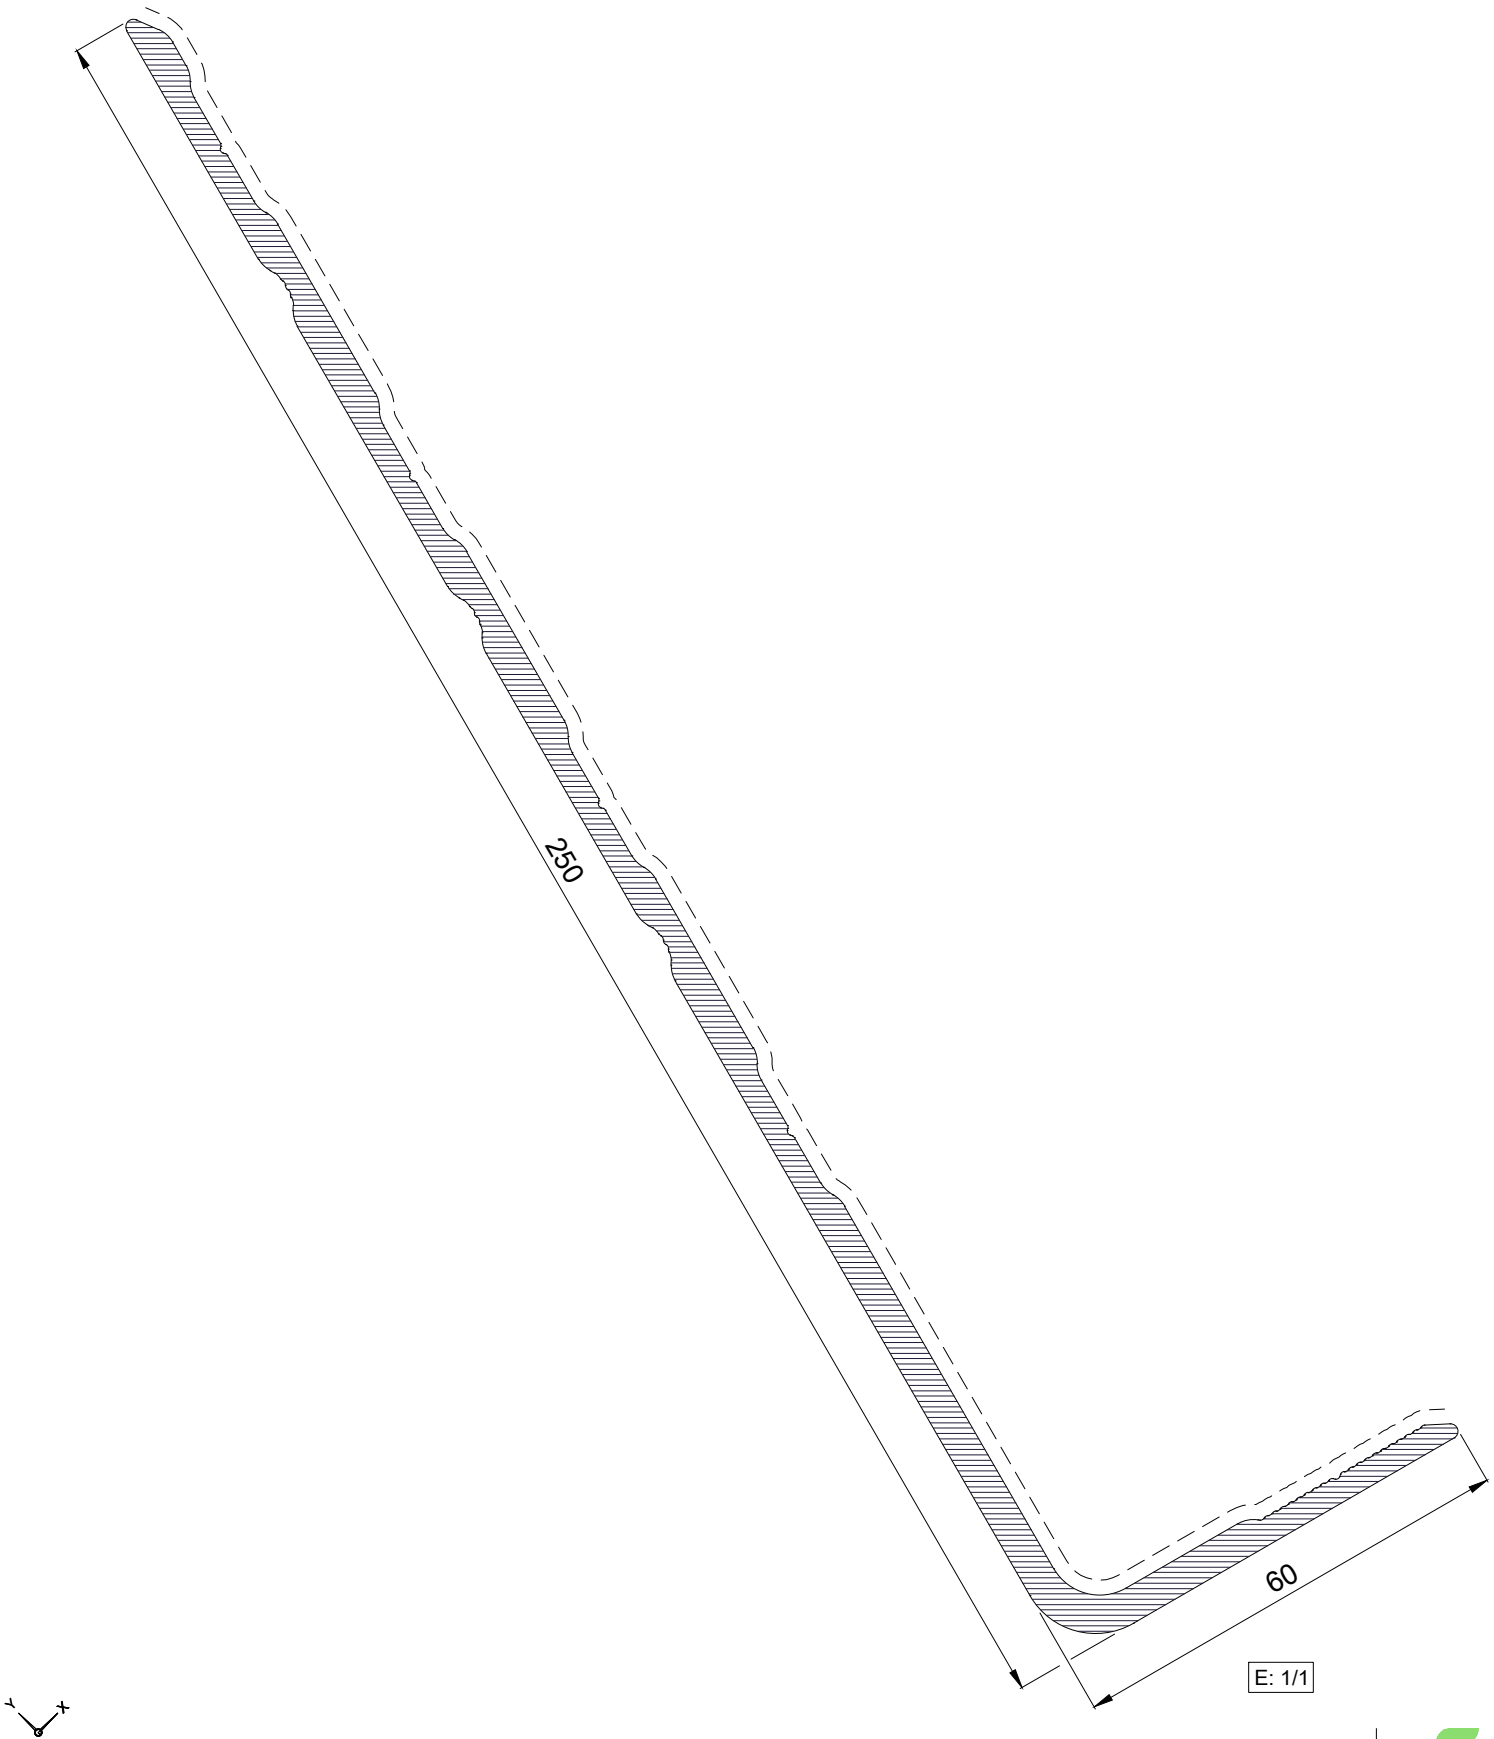

- 4116 Profile

Characteristics:	Weight (kg/m): 6.105	Perimeter (mm): 655	Inertia Ix (cm4): 239,29	Inertia Iy (cm4): 216,44
Please consult minimum order and delivery time depending on the alloy required.				

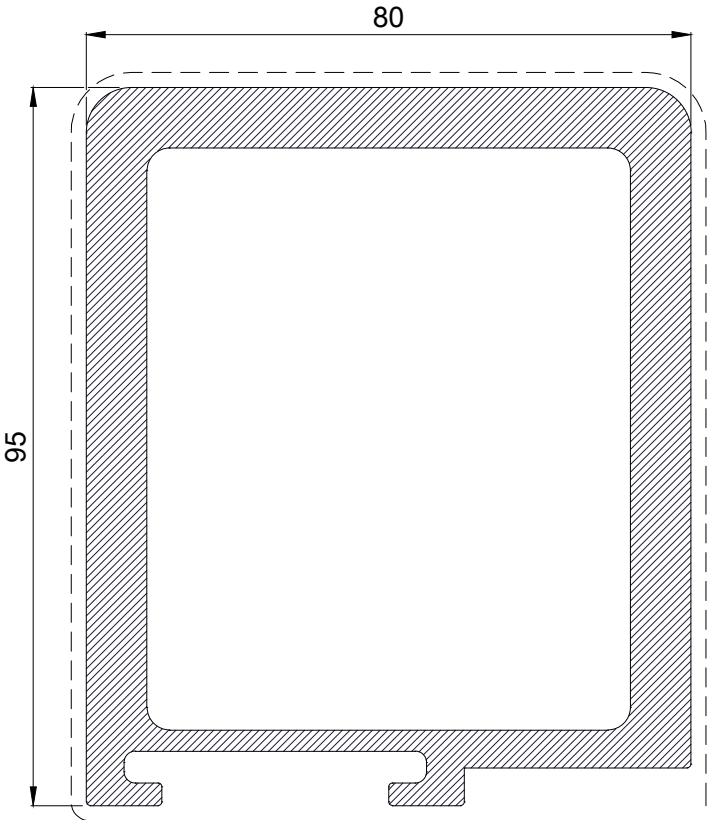


E: 1/1



- 4289 Profile


Characteristics:	Weight (kg/m): 3.729	Perimeter (mm): 356	Inertia Ix (cm4): 9,61	Inertia Iy (cm4): 187,05
Please consult minimum order and delivery time depending on the alloy required.				

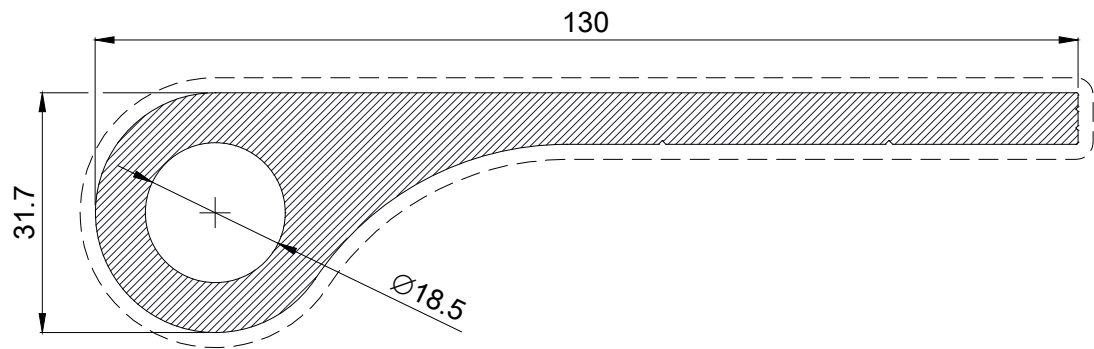

E: 1/1

- 14867 Profile

Characteristics:	Weight (kg/m): 1.849	Perimeter (mm): 425	Inertia Ix (cm4): 10,65	Inertia Iy (cm4): 41,17
Please consult minimum order and delivery time depending on the alloy required.				

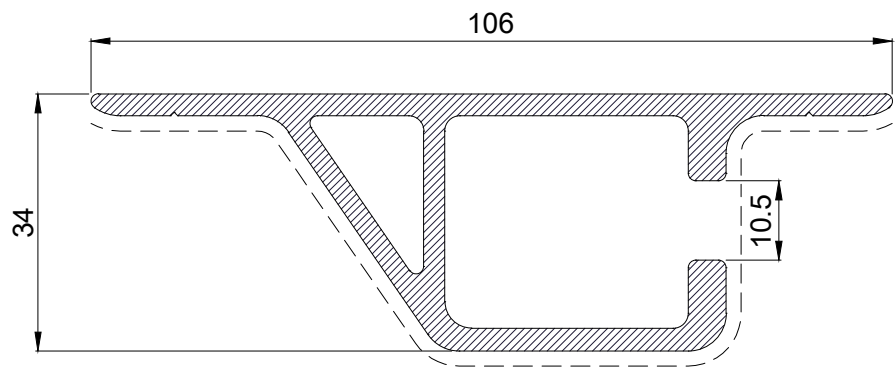


E: 1/1



- 4113 Profile 182,5 x 236,8

Characteristics:	Weight (kg/m): 7.644	Perimeter (mm): 973	Inertia Ix (cm4): 503,83	Inertia Iy (cm4): 1204,89
Please consult minimum order and delivery time depending on the alloy required.				

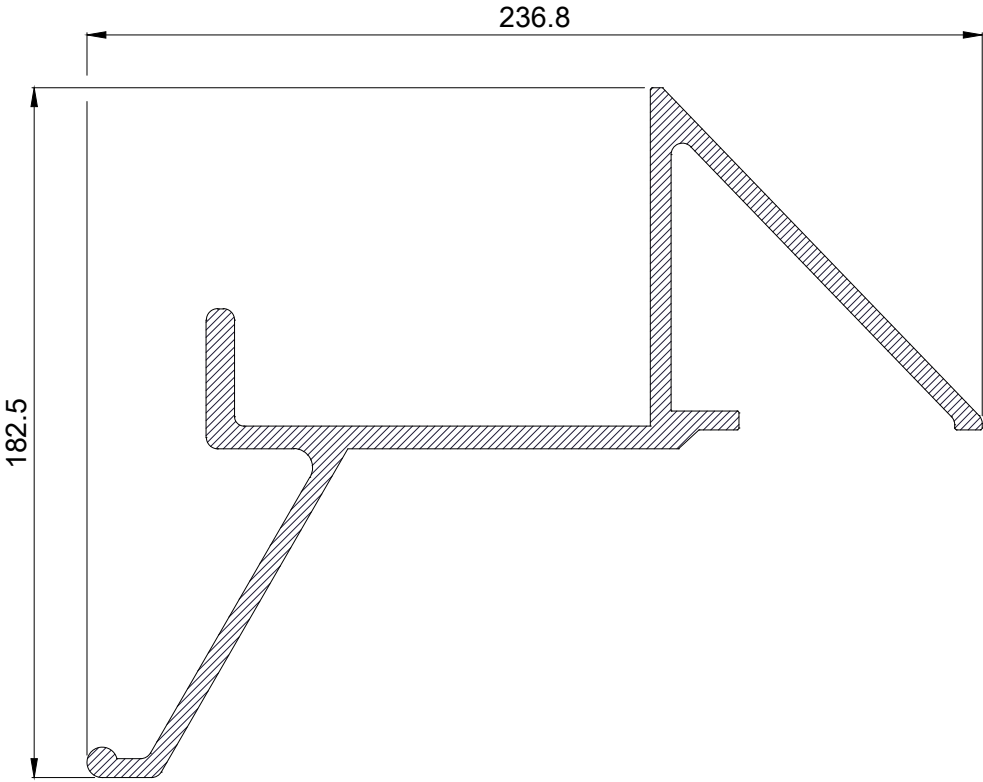


E: 1/2



- 4042 Profile

Characteristics:	Weight (kg/m): 2.670	Perimeter (mm): 421	Inertia Ix (cm4): 59,61	Inertia Iy (cm4): 62,86
Please consult minimum order and delivery time depending on the alloy required.				

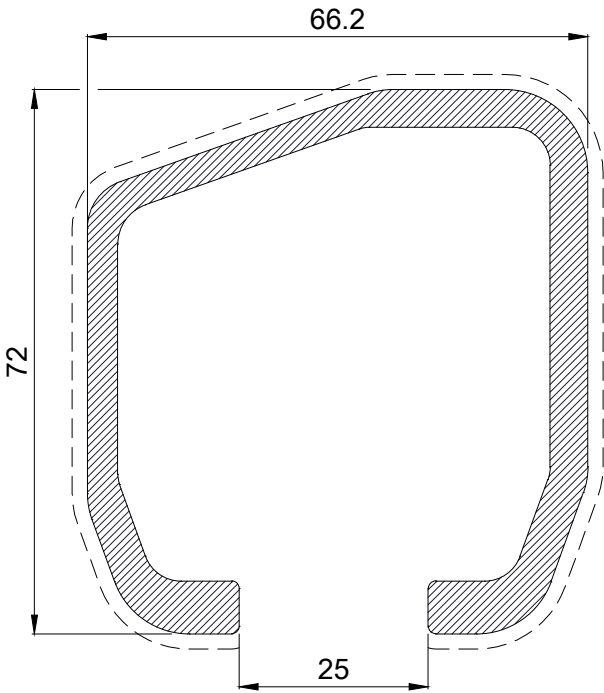


E: 1/1



- 4648 Profile

Characteristics:	Weight (kg/m): 3.829	Perimeter (mm): 827	Inertia Ix (cm4): 6.39	Inertia Iy (cm4): 1219.54
Please consult minimum order and delivery time depending on the alloy required.				

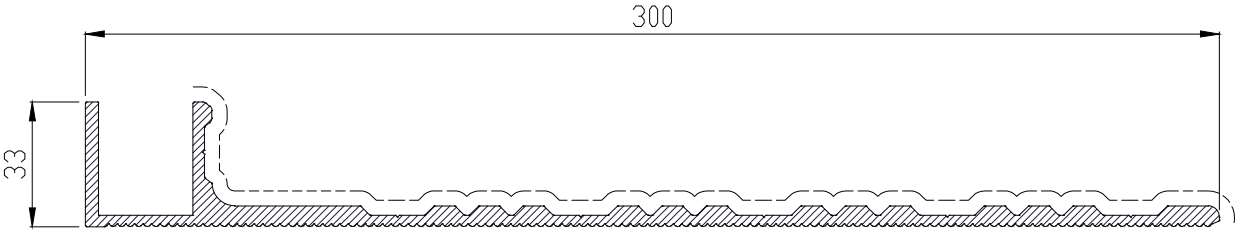


E: 1/2



- 4653 Profile


Characteristics:	Weight (kg/m): 1.982	Perimeter (mm): 271	Inertia Ix (cm4): 13.77	Inertia Iy (cm4): 27.79
Please consult minimum order and delivery time depending on the alloy required.				

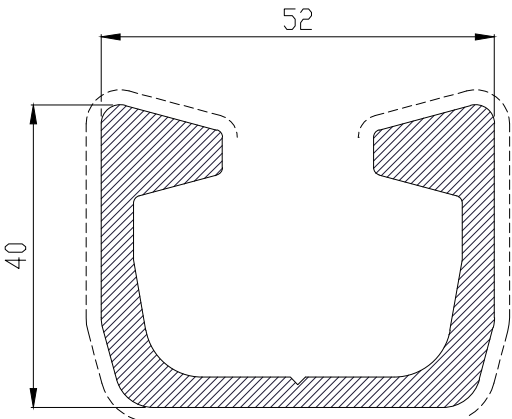

E: 1/1

- 4651 Profile

Characteristics:	Weight (kg/m): 2.279	Perimeter (mm): 324	Inertia Ix (cm4): 18.47	Inertia Iy (cm4): 30.93
Please consult minimum order and delivery time depending on the alloy required.				

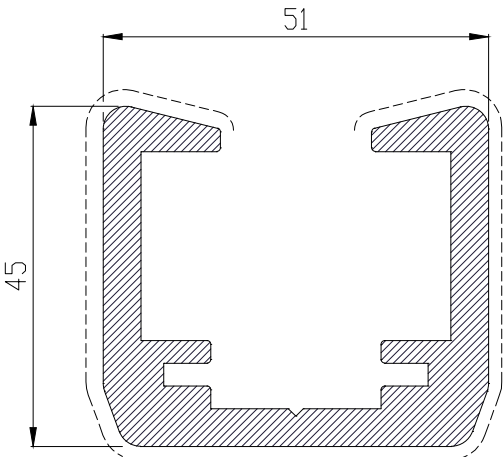


E: 1/1



- 4652 Profile

Characteristics:	Weight (kg/m): 1.299	Perimeter (mm): 418	Inertia Ix (cm4): 159.28	Inertia Iy (cm4): 0.39
Please consult minimum order and delivery time depending on the alloy required.				

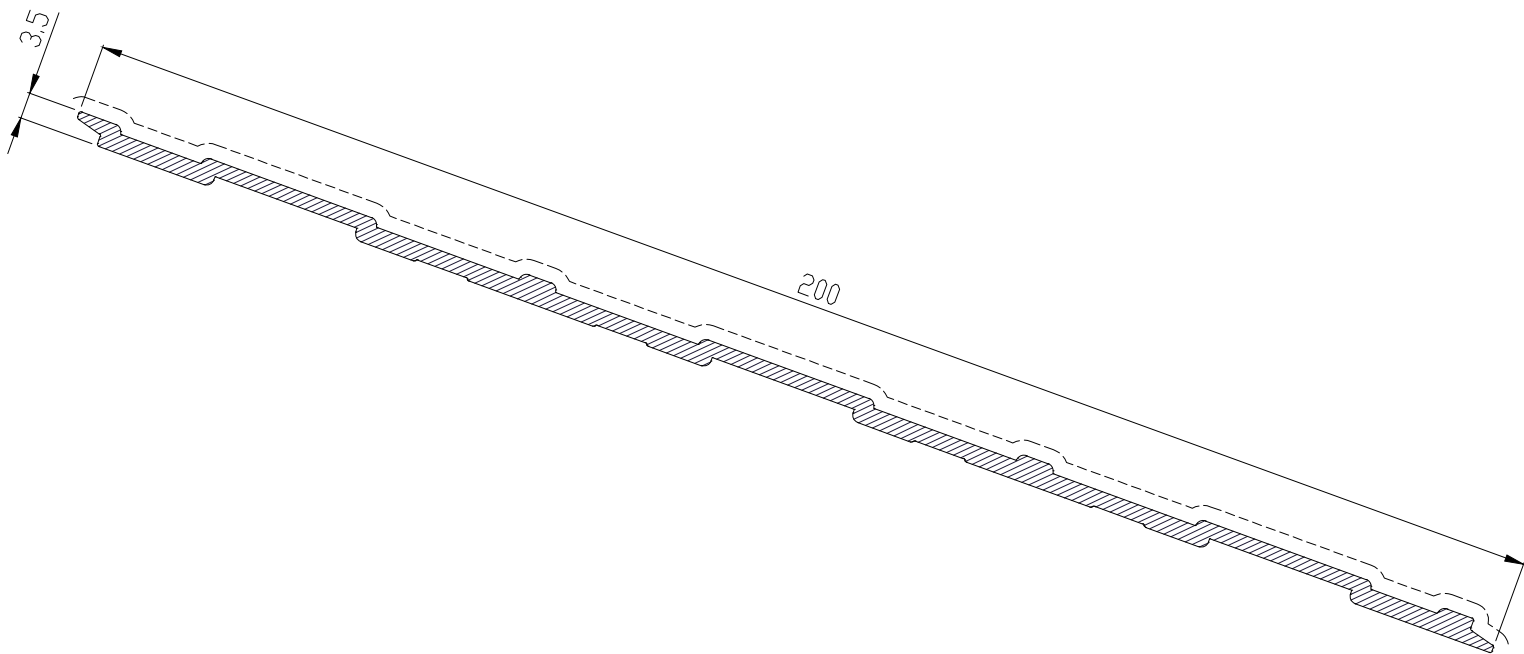


E: 1/1



- 4657 Profile

Characteristics:	Weight (kg/m): 1.998	Perimeter (mm): 441	Inertia Ix (cm4): 6.36	Inertia Iy (cm4): 177.22
Please consult minimum order and delivery time depending on the alloy required.				

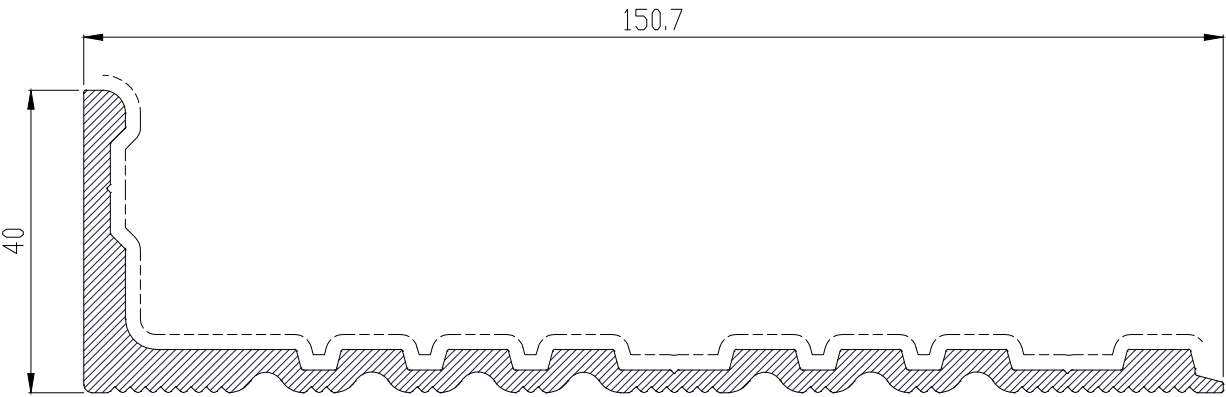

E: 1/1





Campaña s/n
36645, Valga
Pontevedra – Spain
(0034) 986 564 009
industrial@extrugasa.com
www.extrugasa.com